OAK TYPE (R) HC, DH, DHC, QDH SWITCH

CIRCLE TYPE DESIRED

CUT FOR DIA. DECK 1 HOLE - AS REQ'D

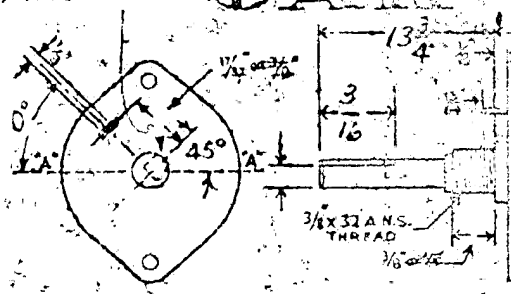

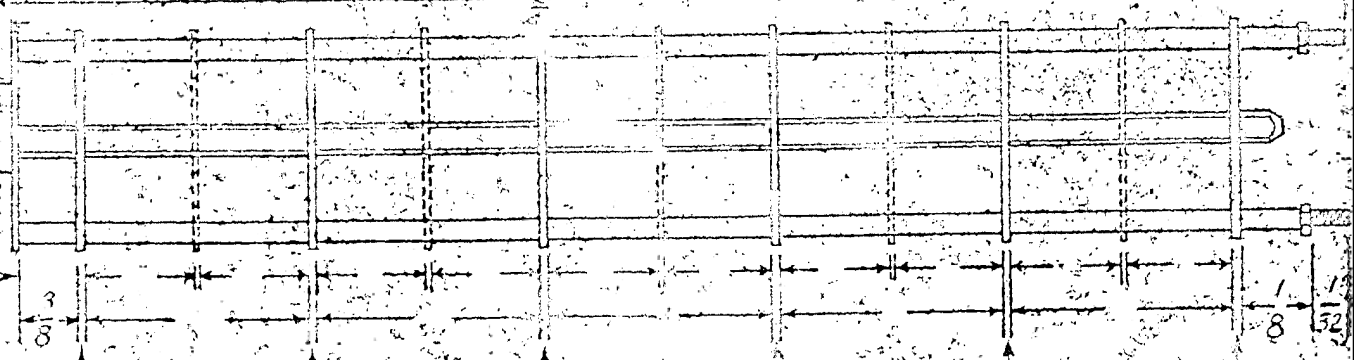

DRAW IN FLAT ON ABOVE SHAFT IN EXTREME COUNTER CLOCKWISE POSITION AND SHOW ANGLE IN REFERENCE TO LINE "A-A"

FRONT AND REAR OF SECTIONS VIEWED FROM FRONT OR KNOB END OF SWITCH IN EXTREME COUNTER CLOCKWISE POSITION

TOTAL NO. OF SECTIONS 1

NO. OF POSITIONS 4

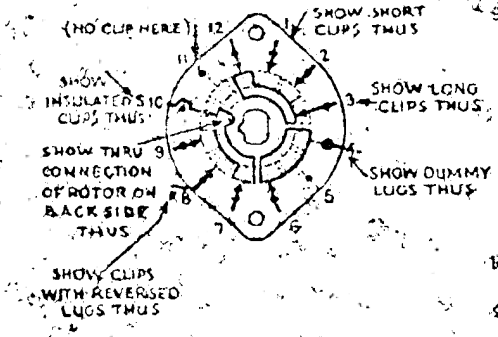

OUTLINE ROTOR BLADES AS ABOVE IN EXTREME COUNTER CLOCKWISE (LEFT) POSITION

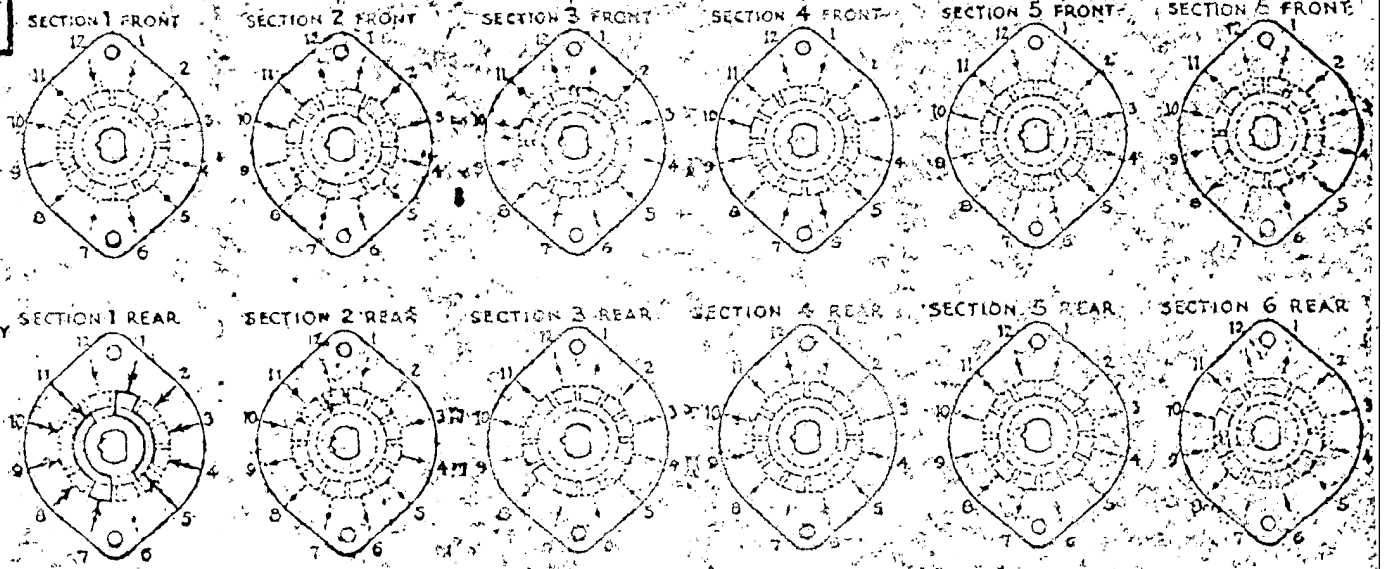

FILL IN ALL DIMENSIONS INDICATED ABOVE AND CHECK ALL SPECIFICATIONS BELOW. REFER TO OAK ENGINEERING DATA SHEETS FOR STANDARD DIMENSIONS OF TYPE DESIRED AND FOR SPECIMEN OF THIS LAYOUT SHEET TO OBTAIN MOST ECONOMICAL UNITS AND SHORTEST DELIVERY DATES PLEASE ADHERE TO THE STANDARDS AS CLOSELY AS POSSIBLE.

SPECIFICATIONS

SHORTING TYPE CONTACTS ☑ NON-SHORTING ☐ IF NOT SPECIFY SHORTING TYPE

INSULATION BAKELITE ☑; CERAMIC ☐ SPECIFY IMPREGNATION IF REQUIRED

FINISH REQUIREMENTS: COMMERCIAL ☐; ARMY ☐; NAVY ☐ SALT TEST (IF ANY GIVE)

CONTACTS AND ROTORS: SILVER PLATED BRASS ☐; SOLID SILVER ALLOY ☐; IF NOT SILVER PLATED BRASS WILL BE SUPPLIED.

MOUNTING HARDWARE: SUPPLY ___ 3/8"-32 NUTS ___ ACROSS FLATS, MATERIAL ___

___ INTERNAL TOOTH LOCKWASHERS, MATERIAL ___

STAMP PART NUMBER ___ (NUMBER) ON FRONT PLATE, YES ☐ NO

CUSTOMER NOTES

ORE No. 24774-H1

OAK MANUFACTURING CO.
1260 CLYBOURN AVE., CHICAGO 10, ILL.

CUSTOMER ___ CUSTOMER'S PART NO. ___

FORM A-3 [illegible]