
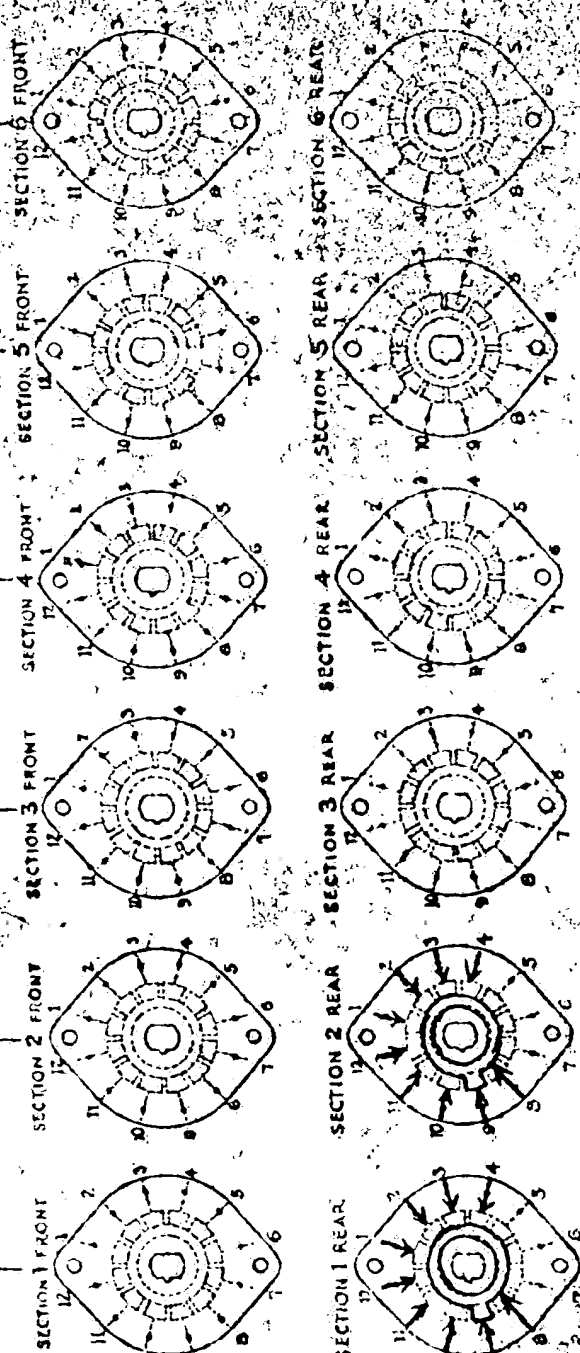


OAK III TYPE SWITCH

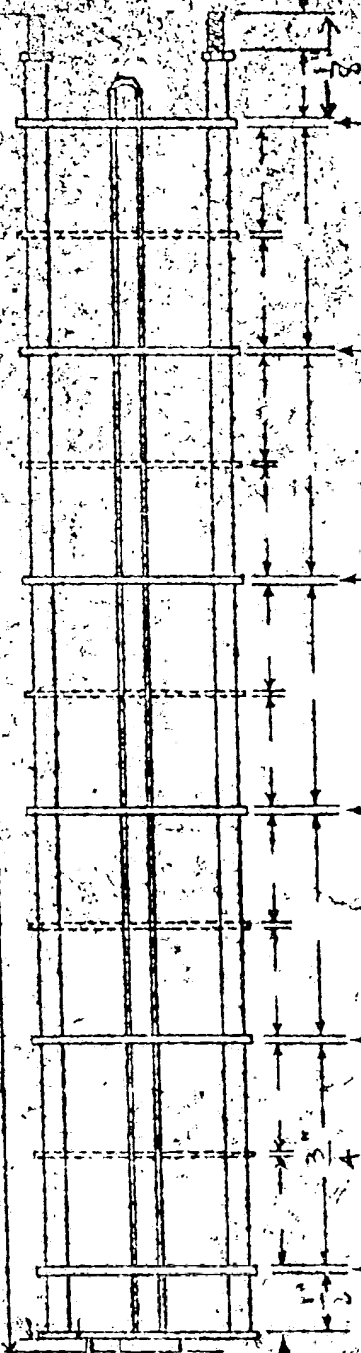


CUSTOMER'S NOTES

Non-shorting
Non-contacts

ONE
1129429-12

FRONT AND REAR OF SECTIONS VIEWED FROM FRONT OF PROBLEM OF SWITCH IN EXTREME COUNTER-CLOCKWISE POSITION TO LINE "A-A"

DRAWN FLAT ON ABOVE SHAFT IN EXTREME COUNTER CLOCKWISE POSITION AND SHOW ANGLE IN REFERENCE TO LINE "A-A"

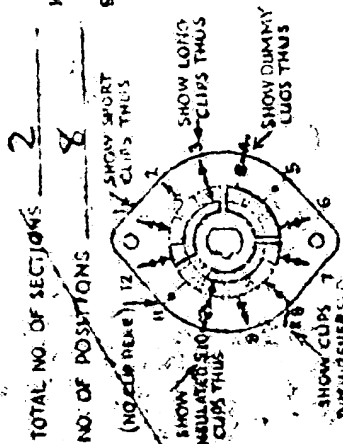

TOTAL NO. OF SECTIONS — 2
NO. OF POSITIONS — 12 (NO. CLIP REAR) 12
SHOW SHORT CLIPS THUS
SHOW LONG CLIPS THUS
SHOW DUMMY LUGS THUS
SHOW CLIPS WITH REVERSED LUGS THUS
OUTLINE ROTOR BLADES ABOVE IN EXTREME COUNTER-CLOCKWISE (LEFT) POSITION

Min. Spacing between Front Plate and first section 1/8" with clip to rear of first section, 5/8" with clips facing front.

Staleids—Standard 1/8" thick and shape of stator.

Rotor Blades—The rotor blades are normally furnished with "shocking" type teeth which maintains connection with one contact unit after the next contact is made.

"Non shorting" type rotor teeth are available if specified and they completely open one contact before they connect to the next contact.

Stator—1/8" thick, with insulated clips 1/8". Mounting center 1 1/2".

Locating Key—1/8" wide, 1/16" on 25° radius at 15° intervals from "A-A". These dim. apply to Double Keys which are 180° apart.

Min. Spacing of Sections—Single sided sections 1/8" when clips face away from each other, 1/16" when clips face in same direction as adjoining sections, and 1/16" when clips of both sections face toward each other.