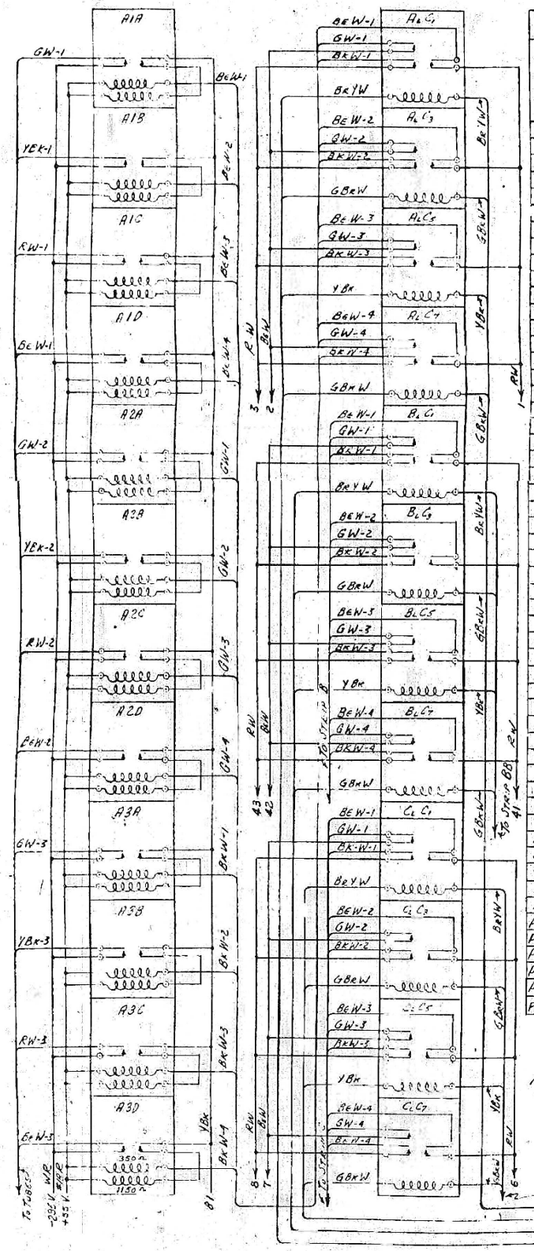

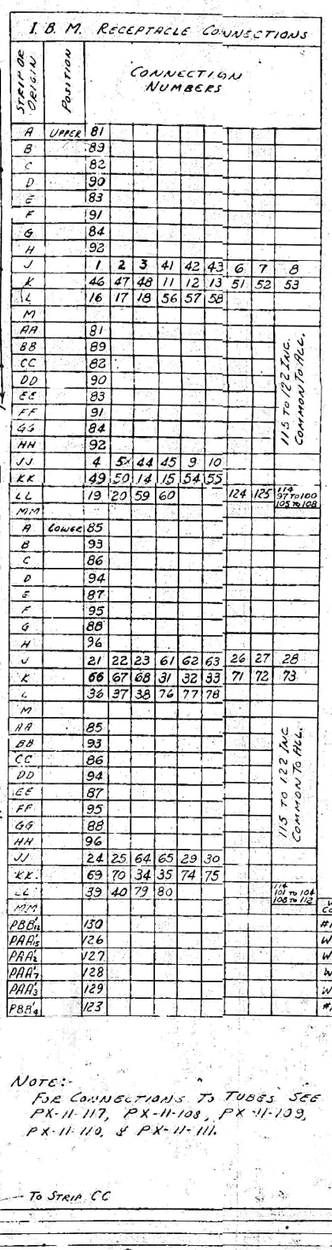

I. B. M. Receptacle Connections

Strip Designation	Position	Connection Numbers									
A	Upper	81									
B		89									
C		82									
D		90									
E		83									
F		91									
G		84									
H		92									
J		1	2	3	41	42	43	6	7	8	
K		46	47	48	11	12	13	51	52	53	
L		16	17	18	56	57	58				
M											
AA		81									
BB		89									
CC		82									
DD		90									
EE		83									
FF		91									
GG		84									
HH		92									
JJ		4	5	44	45	9	10				
KK		49	50	14	15	54	55				
LL		19	20	59	60			124	125	126	127 to 100 / 103 to 108
MM											
A	Lower	85									
B		93									
C		86									
D		94									
E		87									
F		95									
G		88									
H		96									
J		21	22	23	61	62	63	26	27	28	
K		66	67	68	31	32	33	71	72	73	
L		36	37	38	76	77	78				
M											
AA		85									115 to 122 Inc. Common To Rec.
BB		93									
CC		86									
DD		94									
EE		87									
FF		95									
GG		88									
HH		96									
JJ		24	25	64	65	29	30				
KK		69	70	34	35	74	75				
LL		39	40	79	80						114 101 to 106 108 to 112
MM											
PBB'_4		130									
PAA'_1		126									
PAA'_2		127									
PAA'_3		128									
PAA'_5		129									
PBB'_4		123									

Wire Color
#18 BrW
WGBr
WBrY
WBr
WGBr
#18G

Note:
For Connections To Tubes See PX-11-117, PX-11-108, PX-11-109, PX-11-110, & PX-11-111.

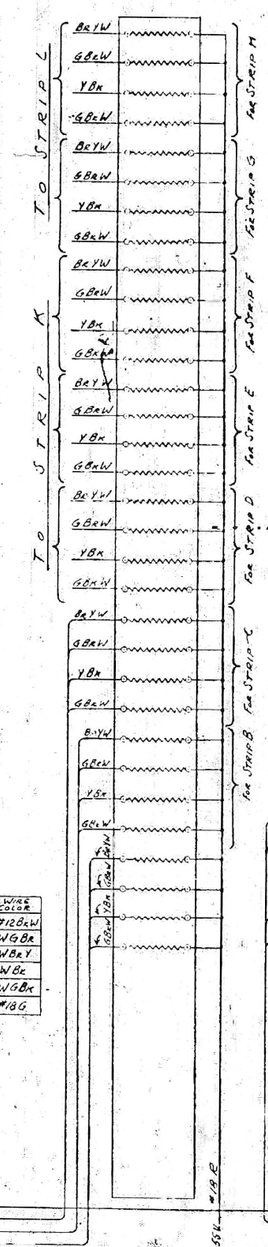

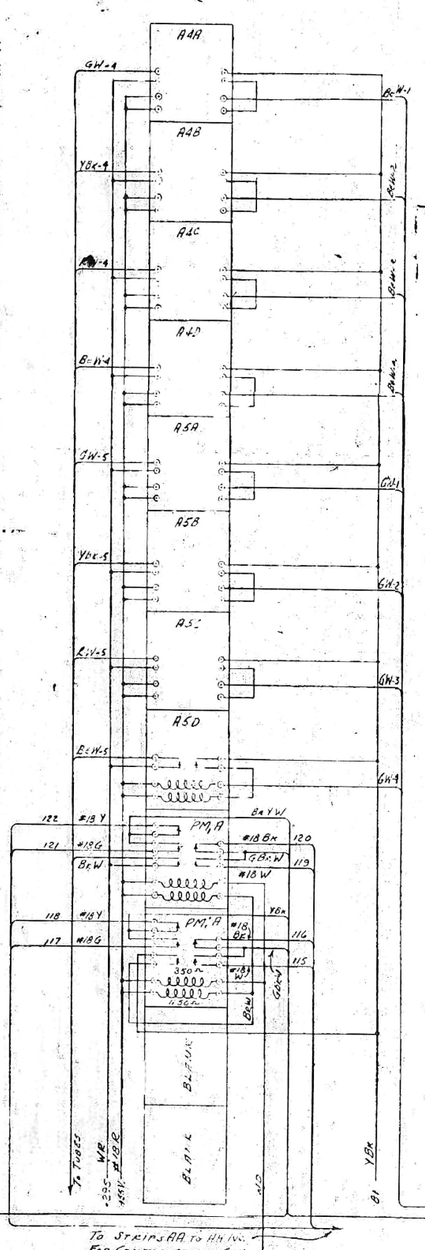

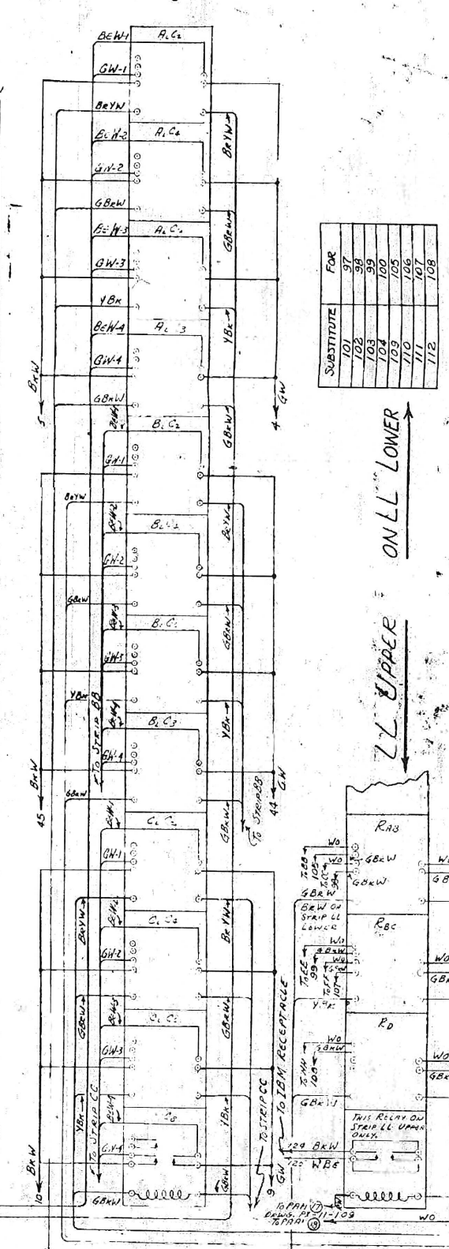

Substitute	For
101	97
102	98
103	99
104	100
105	106
110	107
111	108
112	

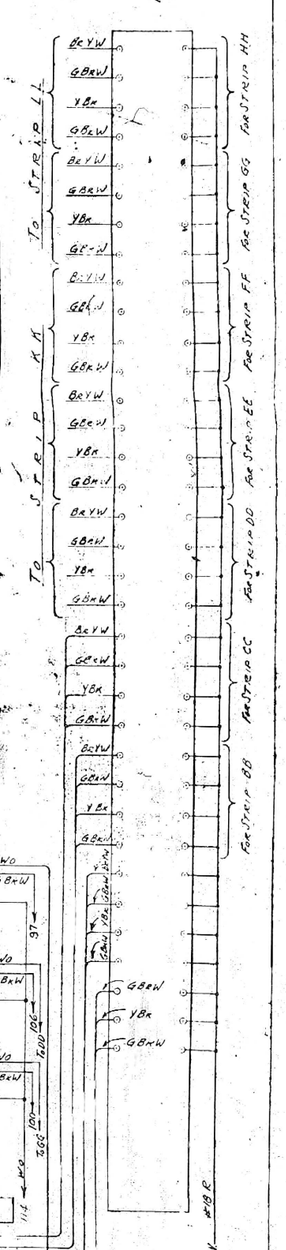

Revisions	
IBM Conn 123 to 130	
Revised On LL Strip Relays - Wiring Revised Accordingly	1
Terminal Assignments to Relays from Tubes -235 V (Terms. 81 & 89) Was 33 TDM Receptacle Terminal 123 Was Connected To Ground	2
Strip Layout Revised Relay Code Numbers (Pin No. Rec. Etc.) Added	3
Wiring Corrected To Eliminate Cross Wiring On Reducer Plug Board	4

MOORE SCHOOL OF ELECTRICAL ENGINEERING
UNIVERSITY OF PENNSYLVANIA

Constant Transmitter Relay Strip Wiring

Material	Finish	Scale

Drawn by:	Checked by:	Approved by:	
J. Cummings Jan 15, 1945	RJ 2 Feb 45		PX-11-118