


NOTE

NUMBERS IN PARENTHESES; 16 12 DENOTE THE TOTAL NUMBER OF SUCH UNITS.
 (E) DENOTES AN ENIAC VOLTAGE
 (R) DENOTES A READER VOLTAGE
 CAM AND RELAY DESIGNATIONS CORRESPOND TO THOSE ON PX-11-119 AND ON PX-11-116
 PM 3 RELAYS STORE "12" SIGNAL FROM READER THEN TRANSMITS AN "11" SIGNAL. ONLY 8 OF THE 16 PM'S HAVE THIS FEATURE.
 HEAVY LINES INDICATE WIRE ADDED FOR 12 PUNCH MINUS.

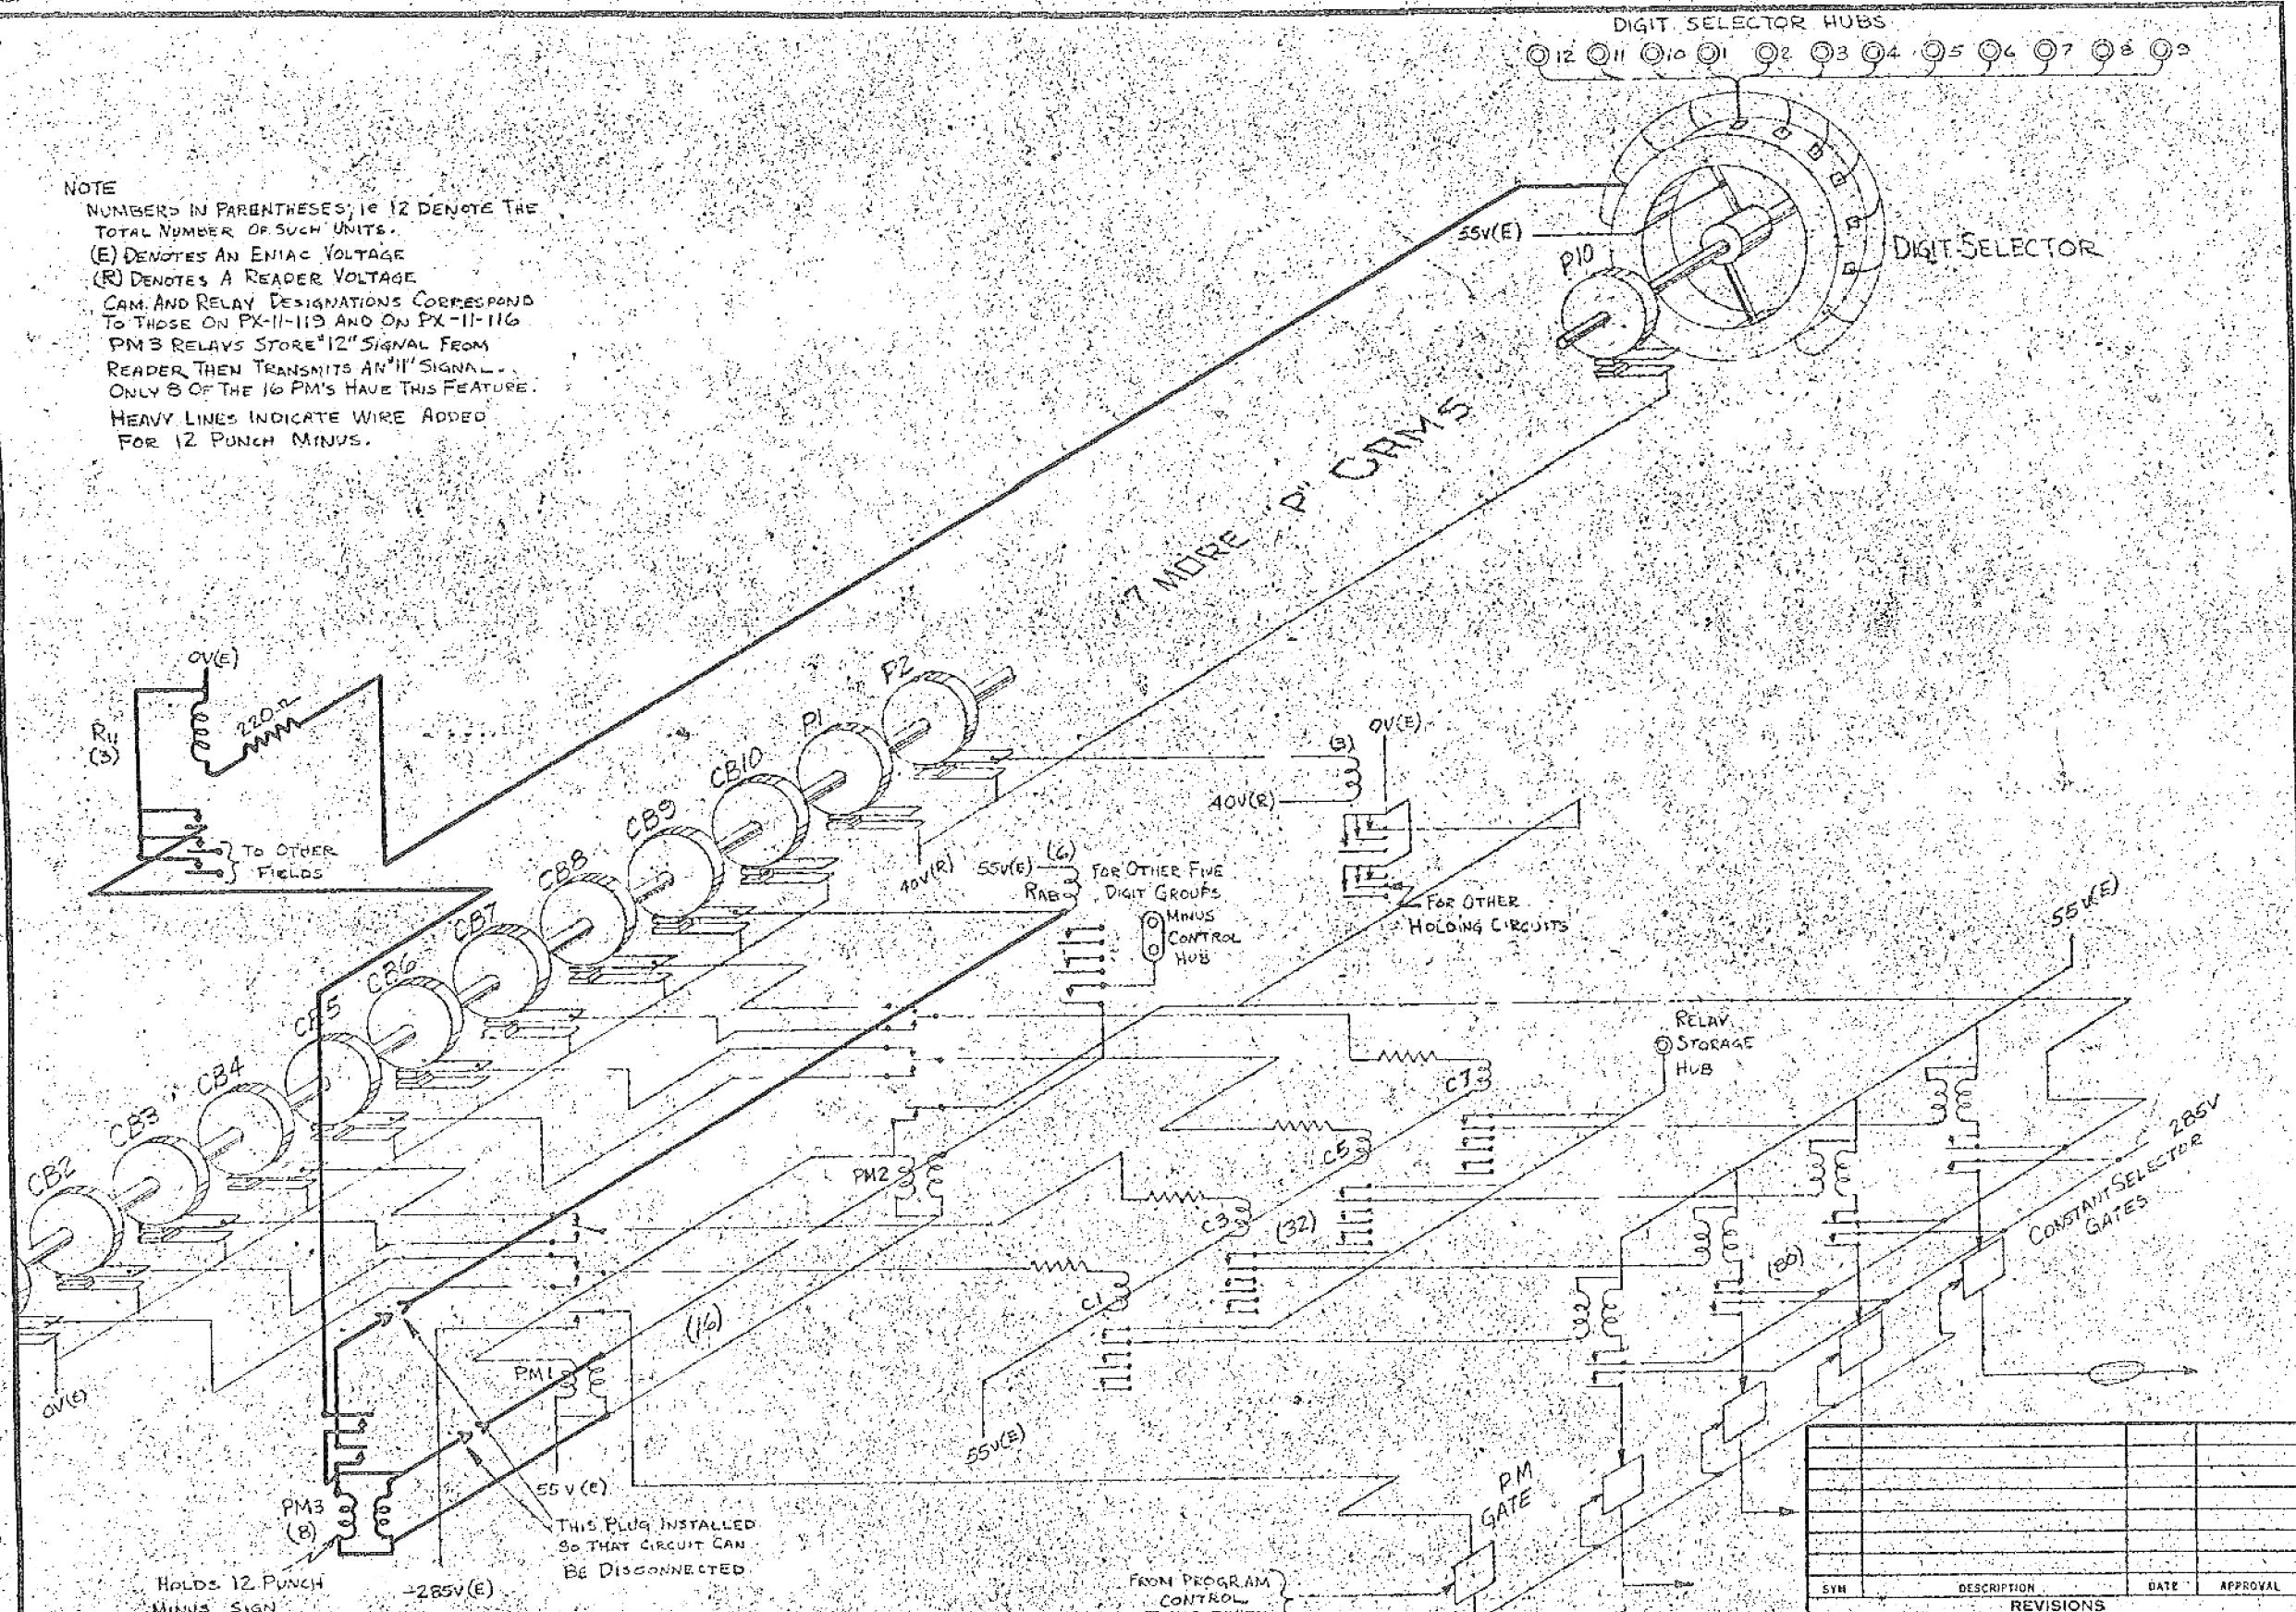

Holds 12 PUNCH MINUS SIGN UNTIL 11 TIME FOR WIRING SEE PX-11-116A

PHYSICAL PROPERTIES		TOLERANCES ON	
YP		DECIMALS	
YS		ANGLES	FRACTIONS
EL 2		MATERIAL	
RA		HEAT TREATMENT	
BH	NEXT ASSY	USED ON	
RH	DO NOT APPLY PART NO.	FINAL PROTECTIVE FINISH	

ORIGINAL DATE OF DRAWING	
DRAFTSMAN	CHECKER
TRACER	CHECKER
ENGINEER	ENGINEER
SUBMITTED	
APPROVED BY ORDER OF THE CHIEF OF ORDNANCE	

REVISIONS	
SYN	DESCRIPTION
	DATE
	APPROVAL

MODIFICATION FOR 12 PUNCH MINUS SIGN ACCEPTANCE

ORDNANCE CORPS
 DEPT. OF THE ARMY
 DWG. SIZE: PX-11-309A
 SHEET OF