


TRANSCEIVERS 29 & 30 CAN BE STANDARD FOR SINGLE ADDITION OPERATION
 TRANSCEIVER 28 HAS AN RP(GATED) PULSE RATHER THAN A CPP AND CAN BE USED AS A PULSE SOURCE FOR PROGRAMING AN EXTRACT FROM THE MEMORY.
 TRANSCEIVER 27 HAS AN RP(UNGATED) PULSE RATHER THAN A CPP. THIS IS USED TO CLEAR PROGRAM RINGS AFTER A MEMORY EXTRACT BUT BEFORE IT ADDS ITS NUMBER TO THE ENIAC.

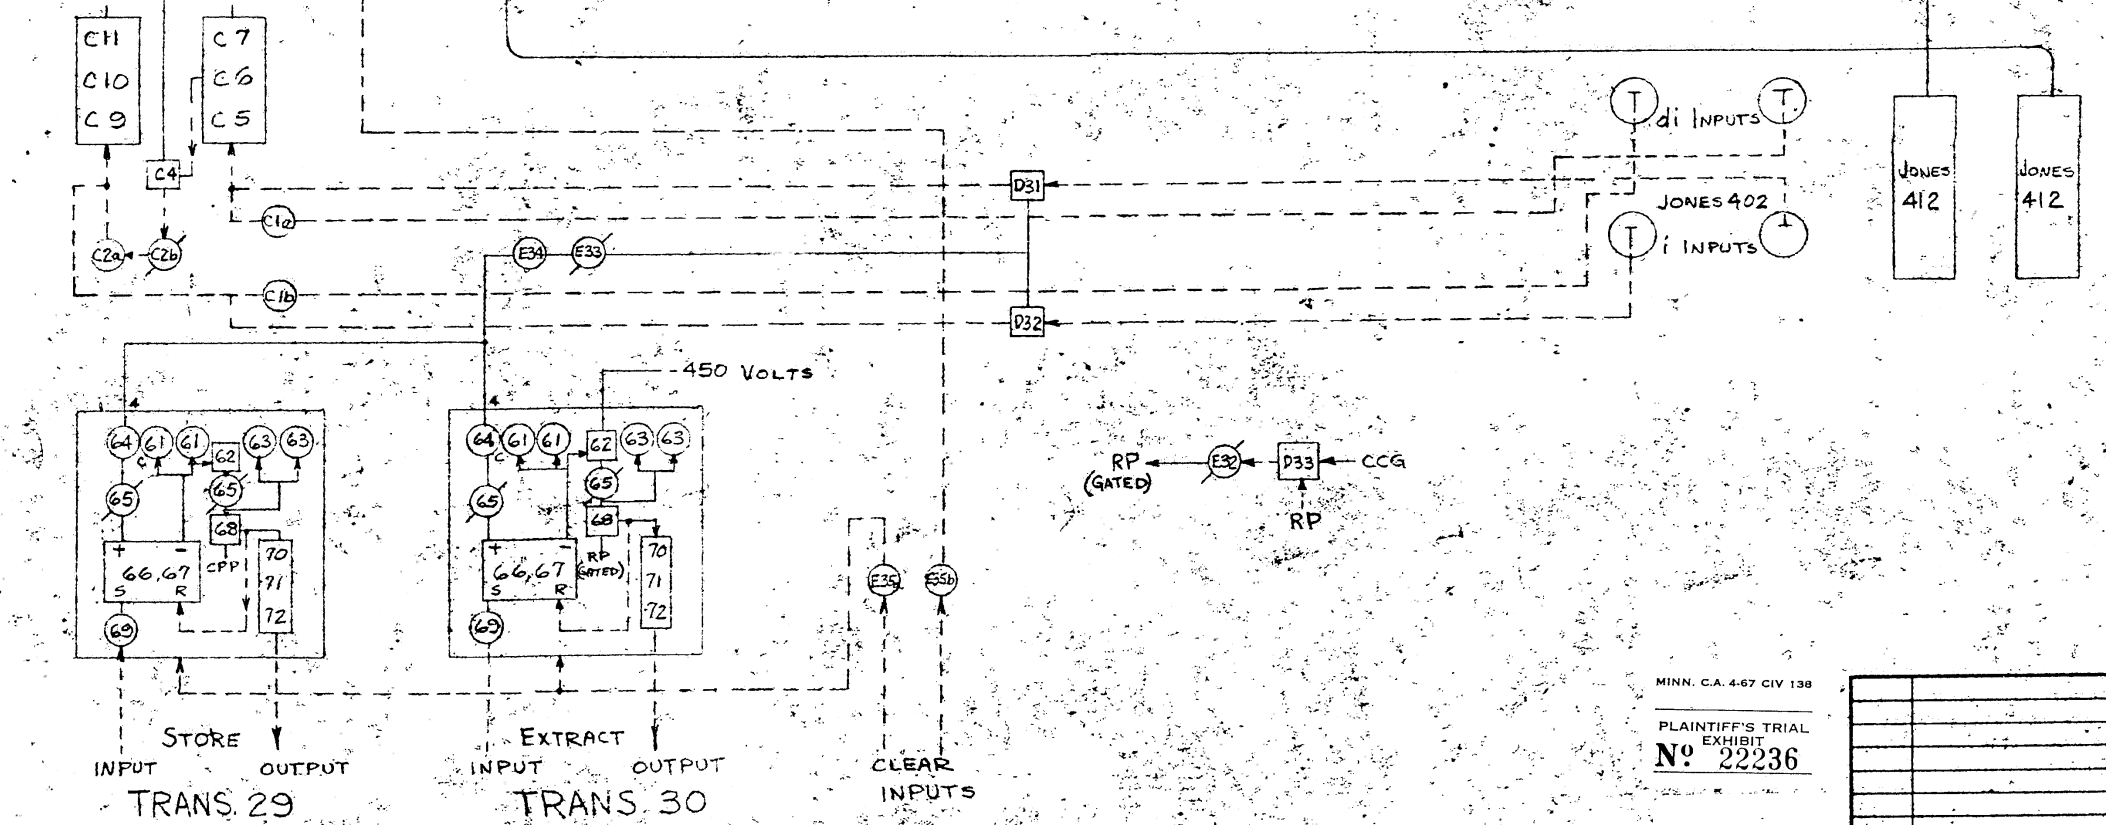

MINN. C.A. 4-67 CIV 138
 PLAINTIFF'S TRIAL EXHIBIT
 No. 22236
 015265

SYN	DESCRIPTION	DATE	APPROVAL

PHYSICAL PROPERTIES		TOLERANCES ON DECIMALS		ORIGINAL DATE OF DRAWING	
YP		ANGLES		DRAFTSMAN	CHECKER
TS		MATERIAL		TRACER	CHECKER
EL 2		HEAT TREATMENT		ENGINEER	ENGINEER
RA		FINAL PROTECTIVE FINISH		SUBMITTED	
BH	NEXT ASSY	USED ON		ORD CORPS	
APPLICATION		DO NOT APPLY PART NO. AS SPECIFIED		APPROVED BY ORDER OF THE CHIEF OF ORDNANCE	
RH				ORD CORPS	

MAGNETIC STATIC MEMORY ADDRESS RINGS DRIVERS AND PROGRAM UNITS

ORDNANCE CORPS DEPT OF THE ARM
 DWG. SIZE C
 PX-11-310
 SHEET OF