


PLUG BOARD FOR GANG PUNCH

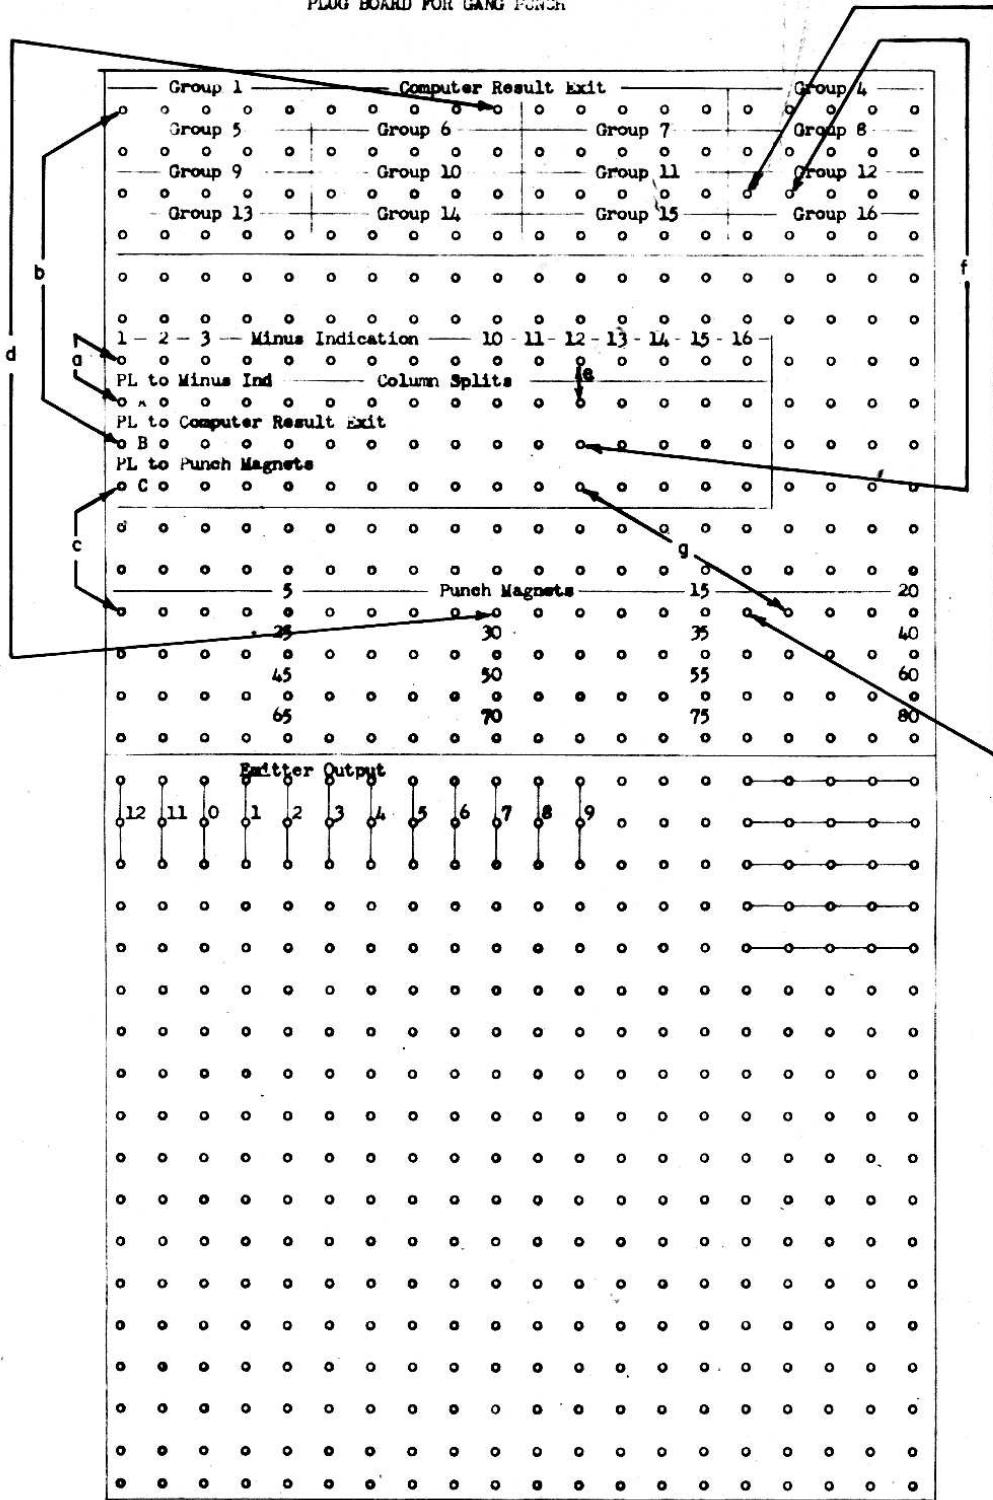

PLUGGING FOR NEGATIVE NUMBERS

The 10 digits stored in the printer relays for groups 1 and 2 are to be printed in the columns 1-10 of the card (b....d). Minus sign indication for these digits (a) is to be punched in column 1 (e).

The digits for the first and second places of printer group 12 (f and h) are to be punched in columns 96 (h) and 17 (g) respectively. The minus punch for group 12 (e) is to appear in column 17 (g).

IBM GANGL PUNCH
 PLUG BOARD
 PX-12-305R1