


1/4 DIA. - 2 HOLES -
 COUNTERSINK FROM
 NEAR FACE FOR
 12-24 FLAT HEAD
 MACHINE SCREW
 TO BE FLUSH WITH
 SURFACE.

DRILL & TAP FOR 12-24
 MACHINE SCREWS -
 2 HOLES

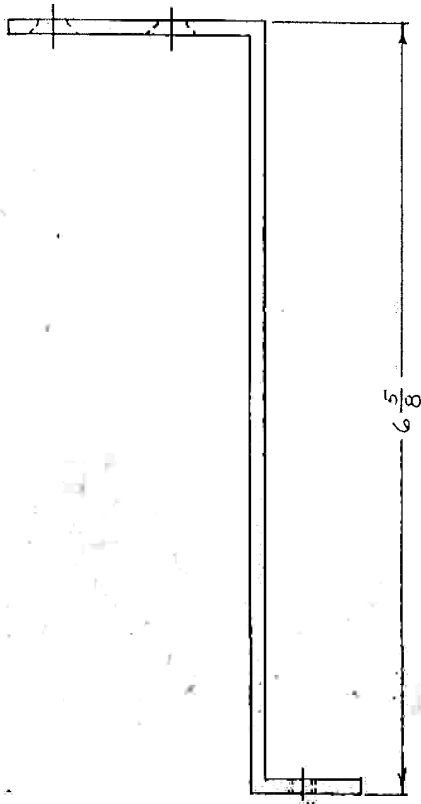

MOORE SCHOOL OF ELECTRICAL ENGINEERING
 UNIVERSITY OF PENNSYLVANIA

REAR TRAY BRACKET

MATERIAL
 1/2 X 1/8 FLAT

FINISH
 UNPOLISHED BRACK

SCALE
 FULL SIZE

Checked by:
 J. Cummings
 7-28-44

Approved by:
 [Signature]
 7-28-44

DATE
 JULY 27, 1944

PX-3-230

VARIATIONS ON FINISHED DIMENSIONS
 (UNLESS OTHERWISE MARKED)

BASIC DIMENSIONS	FUNCTIONAL DIMENSIONS	DECIMAL DIMENSIONS
UP TO 1/8	± 1/100	± .01
ABOVE 1/8 TO 1/2	± 1/50	± .02
ABOVE 1/2 TO 1	± 1/25	± .04
ABOVE 1 TO 2	± 1/12	± .08
ABOVE 2 TO 4	± 1/6	± .16
ABOVE 4 TO 16	± 1/3	± .50
ABOVE 16 TO 64	± 1/16	± 1.50
ABOVE 64 TO 256	± 1/8	± 3.00
ABOVE 256 TO 1024	± 1/4	± 6.00
ABOVE 1024 TO 4096	± 1/2	± 12.00
ABOVE 4096 TO 16384	± 3/4	± 18.00
ABOVE 16384 TO 65536	± 1	± 24.00
ABOVE 65536 TO 262144	± 1 1/2	± 36.00
ABOVE 262144 TO 1048576	± 2	± 48.00
ABOVE 1048576 TO 4194304	± 3	± 72.00
ABOVE 4194304 TO 16777216	± 4	± 96.00
ABOVE 16777216 TO 67108864	± 5	± 120.00
ABOVE 67108864 TO 268435328	± 6	± 144.00
ABOVE 268435328 TO 1073741376	± 8	± 192.00
ABOVE 1073741376 TO 4294965504	± 10	± 240.00
ABOVE 4294965504 TO 17179862016	± 12	± 288.00
ABOVE 17179862016 TO 68719448064	± 15	± 360.00
ABOVE 68719448064 TO 274877792256	± 20	± 480.00
ABOVE 274877792256 TO 1099511169024	± 25	± 600.00
ABOVE 1099511169024 TO 4398044676176	± 30	± 720.00
ABOVE 4398044676176 TO 17592178704704	± 40	± 960.00
ABOVE 17592178704704 TO 70368714818816	± 50	± 1200.00
ABOVE 70368714818816 TO 281474879273216	± 60	± 1440.00
ABOVE 281474879273216 TO 1125899517092800	± 75	± 1800.00
ABOVE 1125899517092800 TO 4503598070371840	± 90	± 2160.00
ABOVE 4503598070371840 TO 18014392281487360	± 100	± 2400.00
ABOVE 18014392281487360 TO 72057569125949440	± 120	± 2880.00
ABOVE 72057569125949440 TO 288230276503797760	± 150	± 3600.00
ABOVE 288230276503797760 TO 1152921106015191040	± 180	± 4320.00
ABOVE 1152921106015191040 TO 4611684424060764160	± 200	± 4800.00
ABOVE 4611684424060764160 TO 18446737696243056000	± 250	± 6000.00
ABOVE 18446737696243056000 TO 73786950785000224000	± 300	± 7200.00
ABOVE 73786950785000224000 TO 295147803140000896000	± 350	± 8400.00
ABOVE 295147803140000896000 TO 11805912125600035776000	± 400	± 9600.00
ABOVE 11805912125600035776000 TO 47223648502400143104000	± 450	± 10800.00
ABOVE 47223648502400143104000 TO 188894594009600572416000	± 500	± 12000.00
ABOVE 188894594009600572416000 TO 755578376038402290560000	± 550	± 13200.00
ABOVE 755578376038402290560000 TO 3022313504153609162240000	± 600	± 14400.00
ABOVE 3022313504153609162240000 TO 12089254016614436648960000	± 650	± 15600.00
ABOVE 12089254016614436648960000 TO 48356996066457746635840000	± 700	± 16800.00
ABOVE 48356996066457746635840000 TO 193427984265831066543360000	± 750	± 18000.00
ABOVE 193427984265831066543360000 TO 773711937063324266173440000	± 800	± 19200.00
ABOVE 773711937063324266173440000 TO 3094847748253297064693760000	± 850	± 20400.00
ABOVE 3094847748253297064693760000 TO 12379390993013188258774400000	± 900	± 21600.00
ABOVE 12379390993013188258774400000 TO 49517563972052753035097600000	± 950	± 22800.00
ABOVE 49517563972052753035097600000 TO 198070255888211012140384000000	± 1000	± 24000.00

USE IN CONJUNCTION WITH MIL-STD-883C