



T

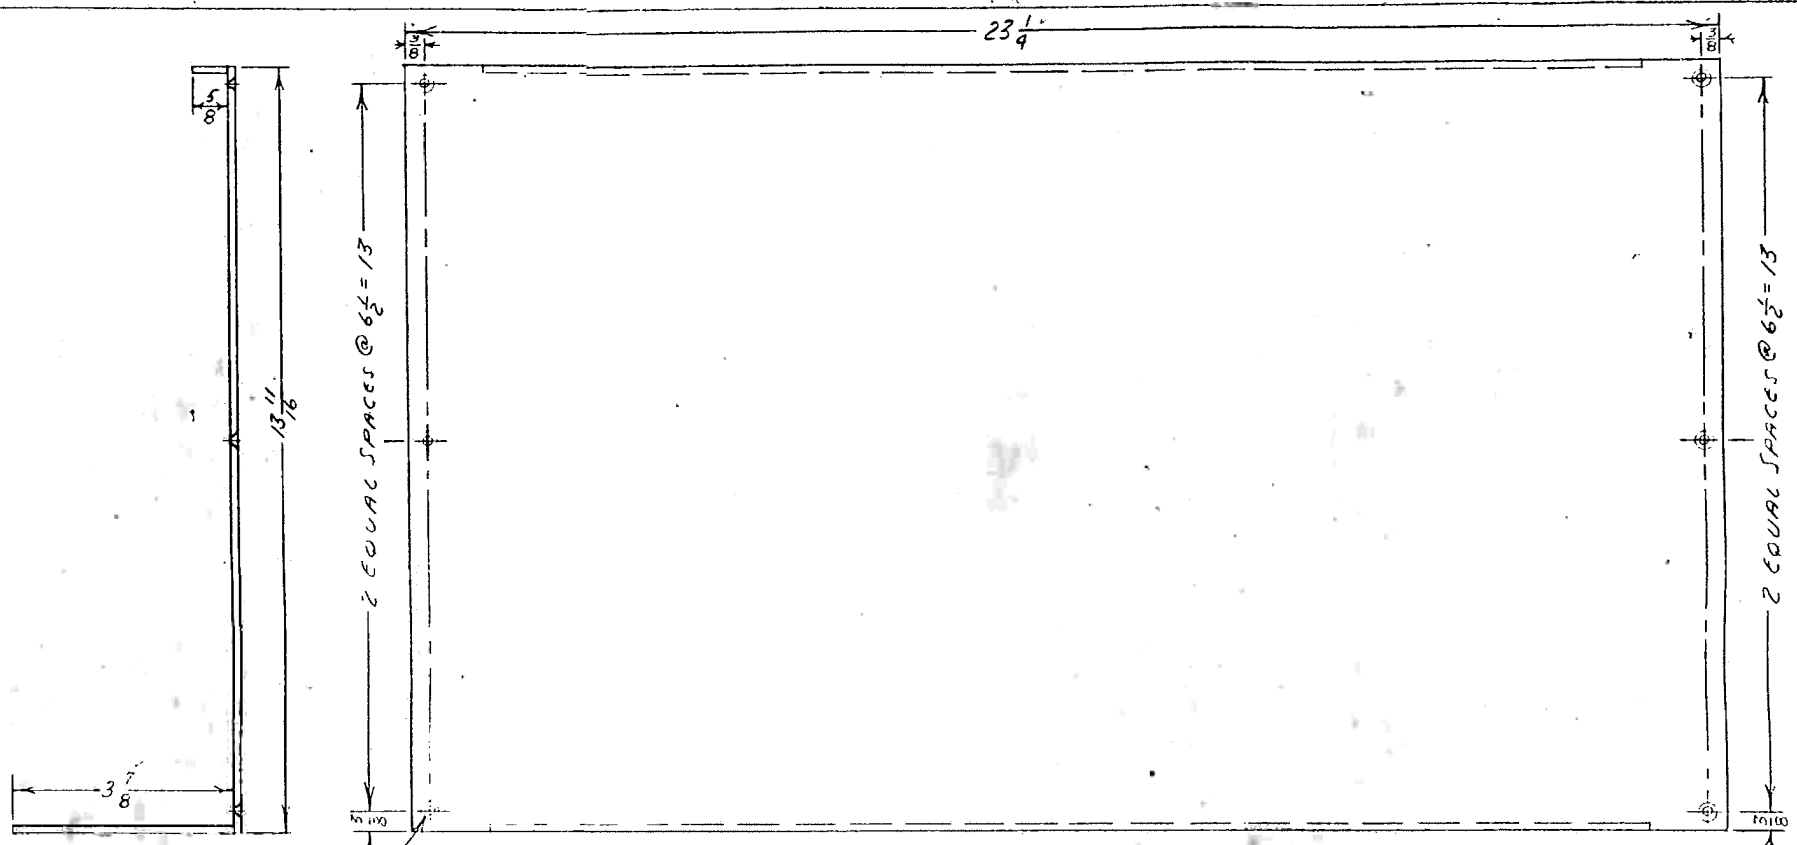

5/32 DIA. 6 HOLES
COUNTER BORE FROM NEAR
FACE FOR 6-32 MACHINE
SCREW TO BE FLUSH WITH
SURFACE.

U

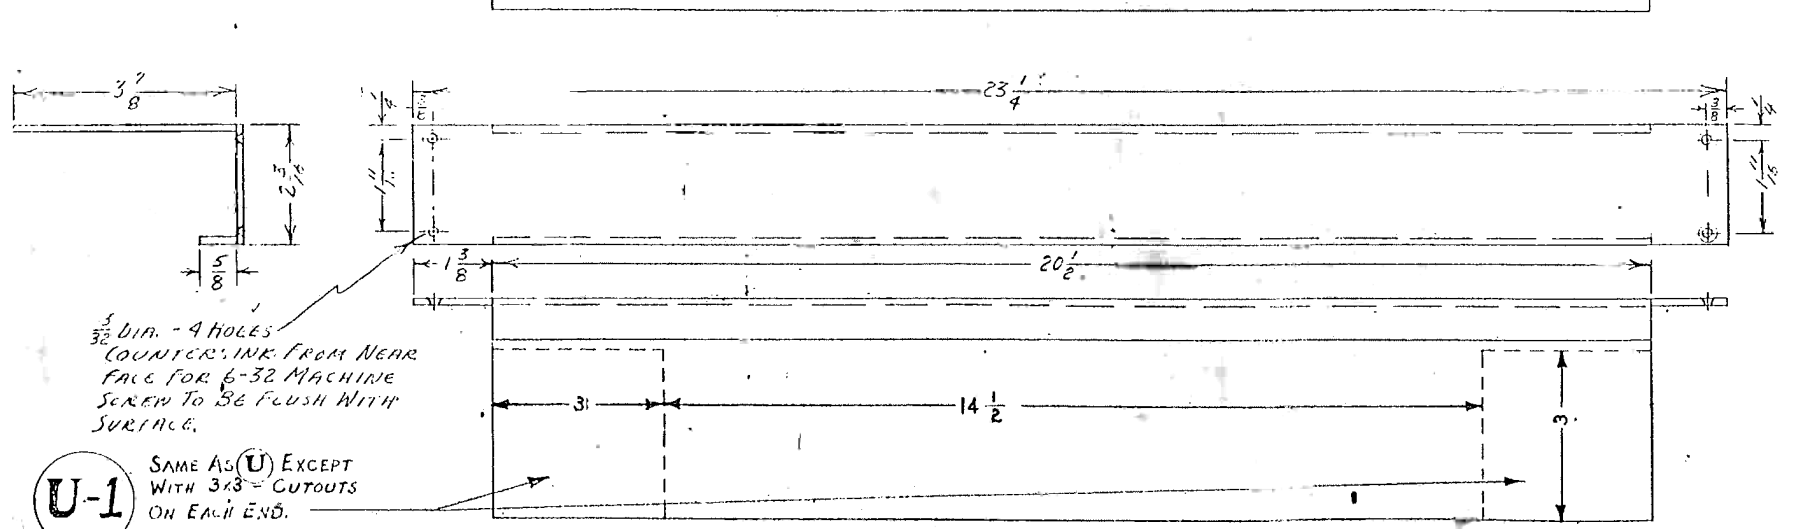

3/32 DIA. - 4 HOLES
COUNTER BORE FROM NEAR
FACE FOR 6-32 MACHINE
SCREW TO BE FLUSH WITH
SURFACE.

U-1 SAME AS **(U)** EXCEPT
WITH 3/8" CUTOUTS
ON EACH END.

CH ADDED.
 11 FEB. 1945 5-3-46

VARIATIONS ON FINISHED DIMENSIONS (UNLESS OTHERWISE SPECIFIED)	
BASIC DIMENSIONS	TYPICAL DIMENSIONS
UP TO 1/8"	± 0.005
ABOVE 1/8" TO 3/16"	± 0.007
ABOVE 3/16"	± 0.010
ALL DIMENSIONS	± 0.015

MOORE SCHOOL OF ELECTRICAL ENGINEERING
UNIVERSITY OF PENNSYLVANIA

D. T. COVER

DEC 27, 1944

1945

PX-3-249-7