

S1

1	PM STATIC INPUT
2	1P
3	PM (ST14)
4	CO (ST15)
5	CFP
6	GROUND

S2


1	110V AC
2	110V AC
3	+225
4	+150
5	+110
6	+75
7	+50
8	+20
9	-40
10	-85
11	-130
12	GROUND

4

3

2

1

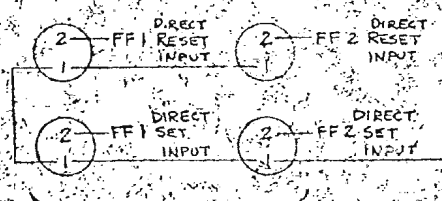

NEGATIVE PULSES
REQUIRED AT
THESE INPUTS

NOTE: RESISTORS ARE TO BE
1/2 W EXCEPT WHEN MARKED

PHYSICAL PROPERTIES		TOLERANCES ON ANGLES		ORIGINAL DATE OF DRAWING	
VP		DECIMALS		11/16/53	
LD		FRACTIONS		DRAFTER: ALD	
TL		MATERIAL		CHECKER:	
PA		HEAT TREATMENT		ENGINEER:	
PH		APPLICATION		SUBMITTED:	
BI		DO NOT APPLY PART NO. AS SPECIFIED		APPROVED BY ORDER OF THE CHIEF OF ORDNANCE:	
				ORD CORPS	
				SCALE: UNIT WT	
				ORDNANCE CORPS DEPT OF THE ARMY	
				PX-4-148	
				SHEET OF	