NOTE:

1. ALL RESISTORS ARE ½ WATT, UNLESS OTHERWISE STATED.
2. * FOR RESISTORS & CONDENSORS SO MARKED SEE CHART ON DFWG. PX-5-33.
3. RATED WORKING VOLTAGE FOR ALL CONDENSERS SHALL BE AS FOLLOWS, UNLESS OTHERWISE INDICATED:
   .003 µf OR SMALLER - 500 V OR BETTER
   .004 µf OR LARGER - 300 V OR BETTER.

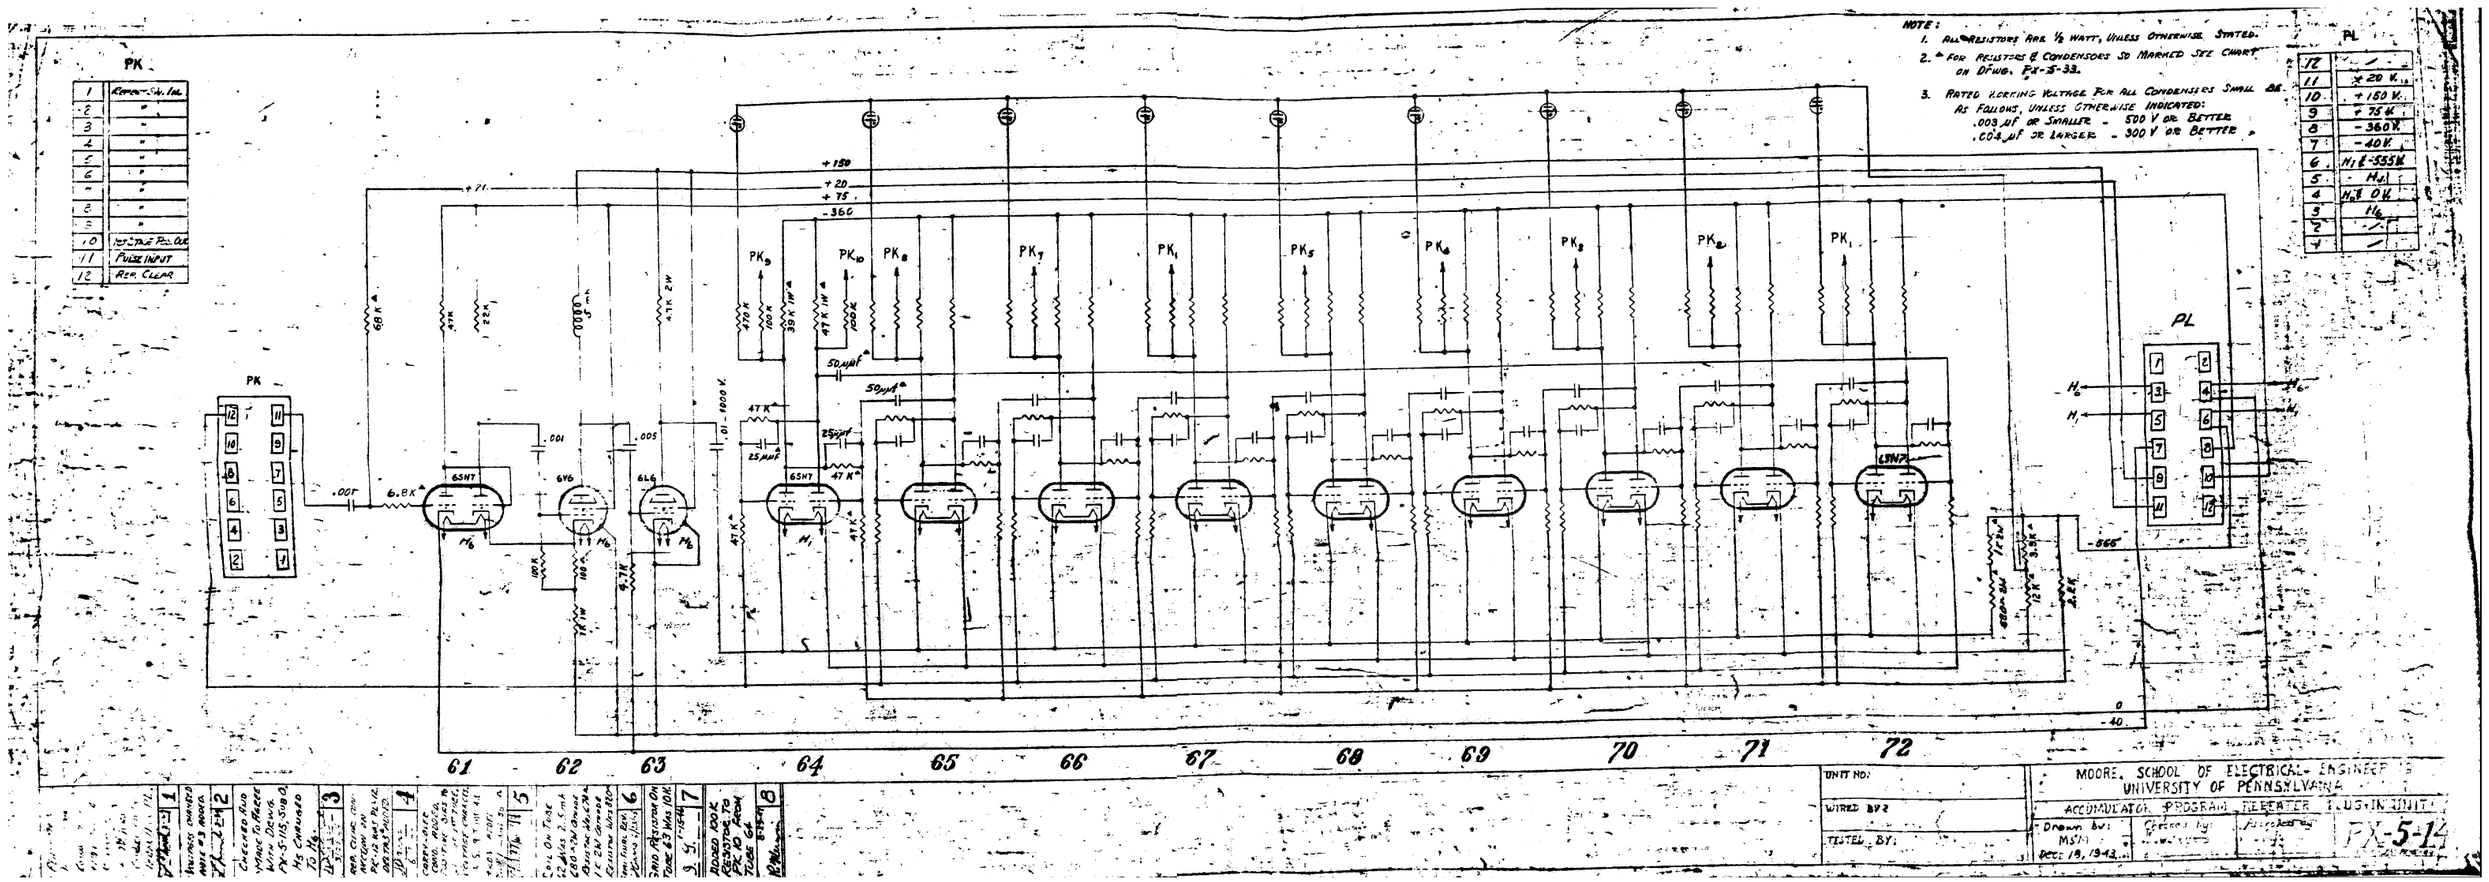

1	REPEAT-SW. INL.
2	"
3	"
4	"
5	"
6	"
7	"
8	"
9	"
10	1ST STAGE PULSE
11	PULSE INPUT
12	REP. CLEAR

12	/
11	+20 V.
10	+150 V.
9	+75 V.
8	-360 V.
7	-40 V.
6	H_1 & -555 V.
5	H_1
4	H_6 & 0 V.
3	H_6
2	/
1	/

UNIT NO:	
WIRED BY:	
TESTED BY:	

MOORE SCHOOL OF ELECTRICAL ENGINEERING
UNIVERSITY OF PENNSYLVANIA

ACCUMULATOR PROGRAM REPEATER TRUNK UNIT

Drawn by: MSN
Date: Dec. 18, 1943

PX-5-14