


# OAK TYPE LOCKER SWITCH

0.161 DIA. ± .002 DEEP  
1.10 DIA. ± .002 FLAT




FRONT AND REAR OF SECTIONS VIEWED FROM FRONT OR REAR END OF SWITCH. ANGLE IN REFERENCING TO LINE A-A

TOTAL NO. OF SECTIONS: 9  
NO. OF POSITIONS: 9



OUTLINE ROTOR BLADES AS ABOVE IN EXTREME COUNTER-CLOCKWISE (LEFT) POSITION

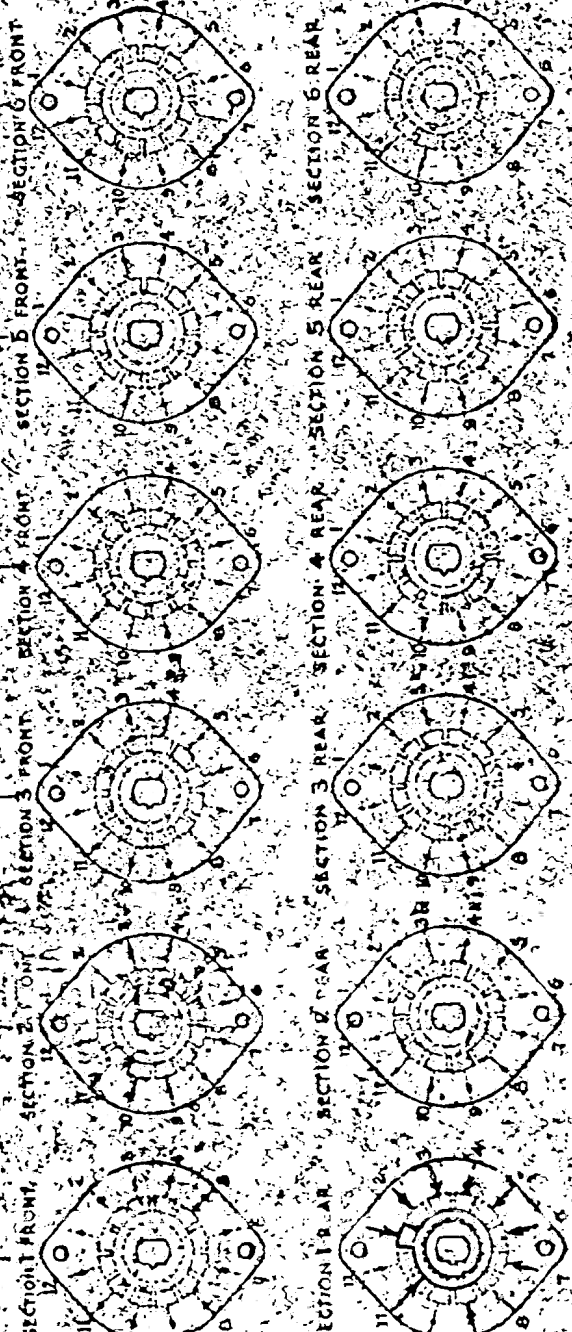

FILL IN ALL DIMENSIONS INDICATED ABOVE AND CHECK A/B SPECIFICATIONS BELOW. REFER TO OAK ENGINEERING DATA SHEETS FOR STANDARD DIMENSIONS OF TYPE DESIRED AND FOR SPECIMEN OF THIS LAYOUT SHEET, TO OBTAIN MOST ECONOMICAL UNITS AND SHORTEST DELIVERY DATES PLEASE ADHERE TO THE STANDARDS AS CLOSELY AS POSSIBLE.

SPECIFICATIONS  
 SHORTING TYPE CONTACTS  NON-SHORTING  IF NOT SPECIFIED SHORTING TYPE WILL BE SUPPLIED.  
 INSULATION: BAKELITE  CERAMIC  SPECIFY IMPREGNATION, IF REQUIRED.  
 FINISH REQUIREMENTS: COMMERCIAL  ARMY  NAVY  SALT TEST (IF ANY GIVE DETAILS)  
 CONTACTS AND ROTORS: SILVER PLATED BRASS  SOUD SILVER ALLOY  IF NOT SPECIFIED SILVER PLATED BRASS WILL BE SUPPLIED.  
 MOUNTING HARDWARE: SUPPLY 3/4 - 32 NUTS  ACROSS FLATS: MATERIAL  PLATING   
 INTERNAL LOCKWASHER: MATERIAL  PLATING   
 ON FRONT PLATE: YES  NO

CUSTOMER NOTES

PHX No. 26686-11 CASE NO. 59  
 INST. NO. 58-138  
 USED IN 2281(8)

OAK MANUFACTURING CO. 1250 CLYBORN AVE. OF ADO 10, ILL. CUSTOMER MAKE SCHOOL 11, OF PART NO. 258

STAMP PART NUMBER: (NUMBER)  
 DATE: 9-4-25