OAK "H" TYPE SWITCH

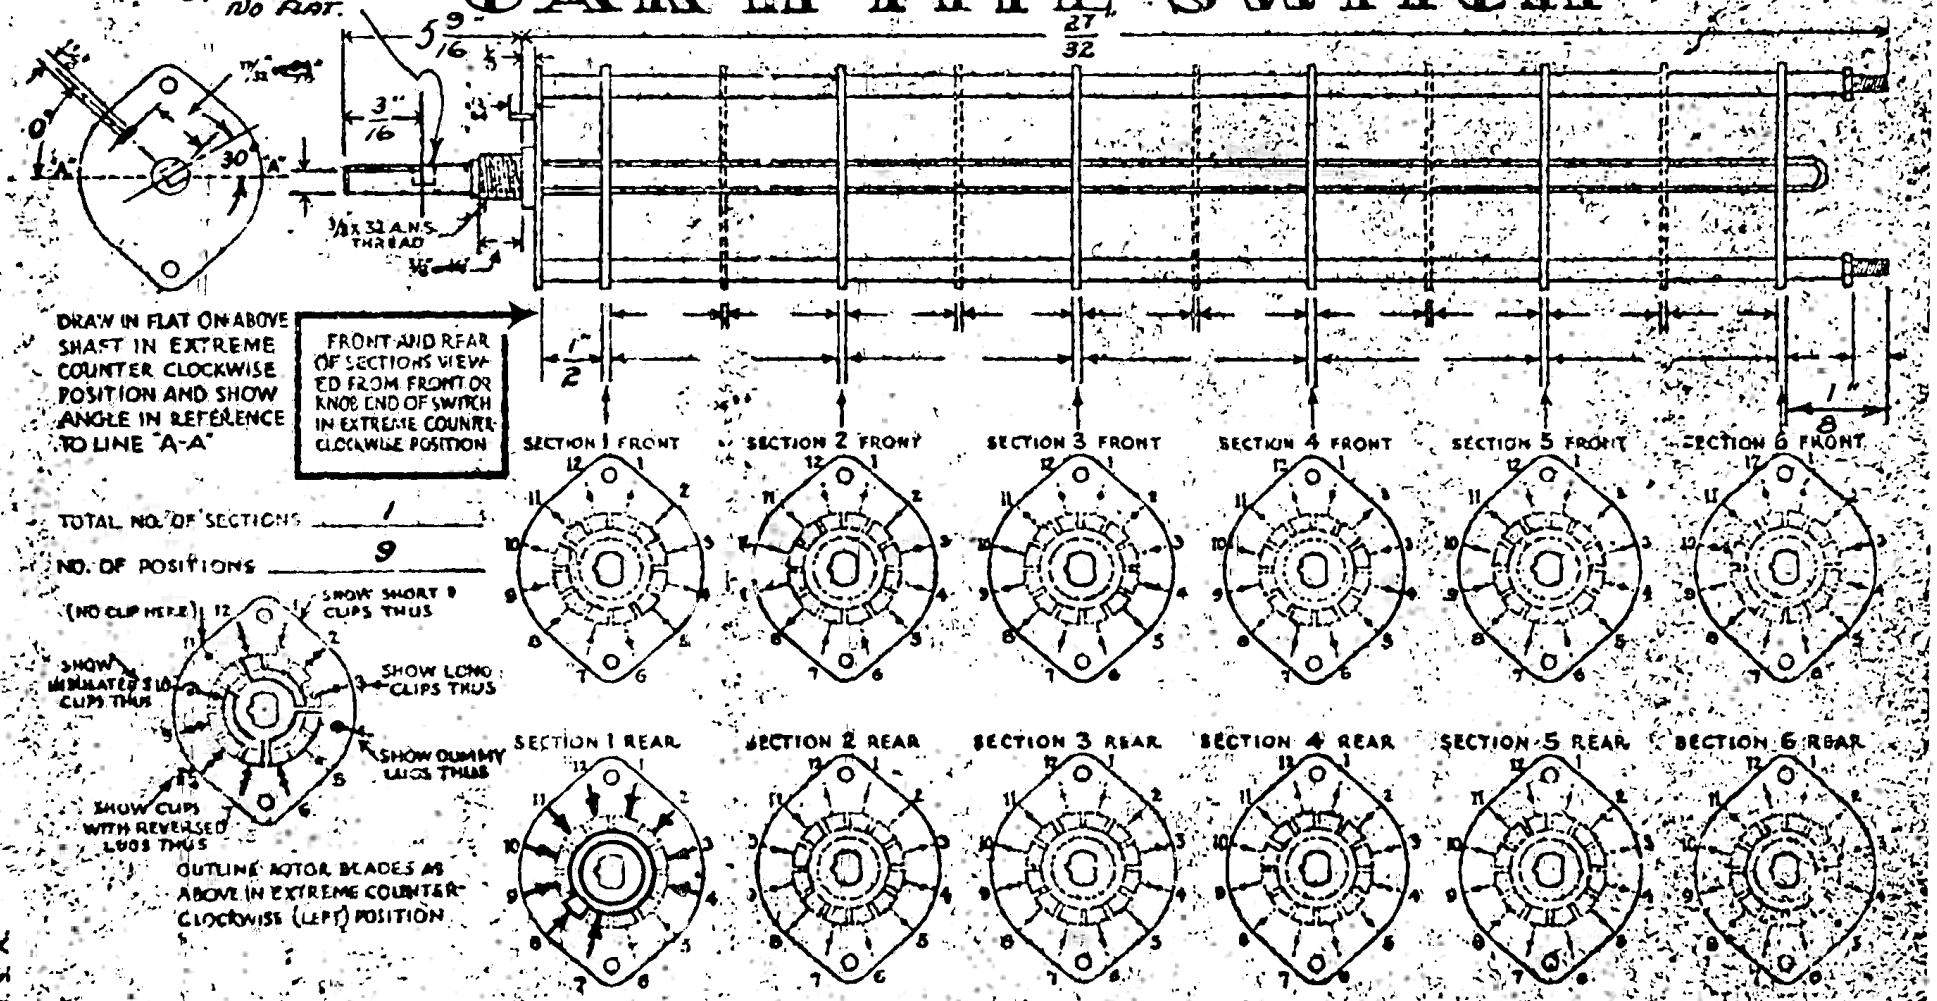

TOTAL NO. OF SECTIONS 1

NO. OF POSITIONS 9

Stator—1/8" thick, with insulated clips 1/8". Mounting centers 1 1/8".

Locating Keys—1/8" wide 1 1/8" or 3/8" radius at 15° intervals from "A-A". These dim. apply to Double Keys which are 180° apart.

Min. Spacing of Sections—Single sided sections 1/8" when clips face away from each other; 3/16" when clips face in same direction as adjoining sections, and 1/8" when clips of both sections face toward each other.

Min. Spacing between Front Plate and first section 1/8" with clip to rear of first section, 3/8" with clips facing front.

Shields—Standard 1/8" thick and shape of stator.

Rotor Blades—the rotor blades are normally furnished with "shooting" type teeth which maintain connection with one contact until after the next contact is made.

"Non shooting" type rotor teeth are available if specified at ; they operate after one contact "before" they contact to the next contact.

CUSTOMER'S NOTES

OAK No. 28177-H1

USED IN MUX (24) & FT (11)

CUSTOMER'S PART NO. PX-G-22

CUSTOMER MOORE SCHOOL - U of P

OAK MANUFACTURING CO.
1204 CLYBOURN AVE., CHICAGO, U.S.A.