OAK "H" TYPE SWITCH

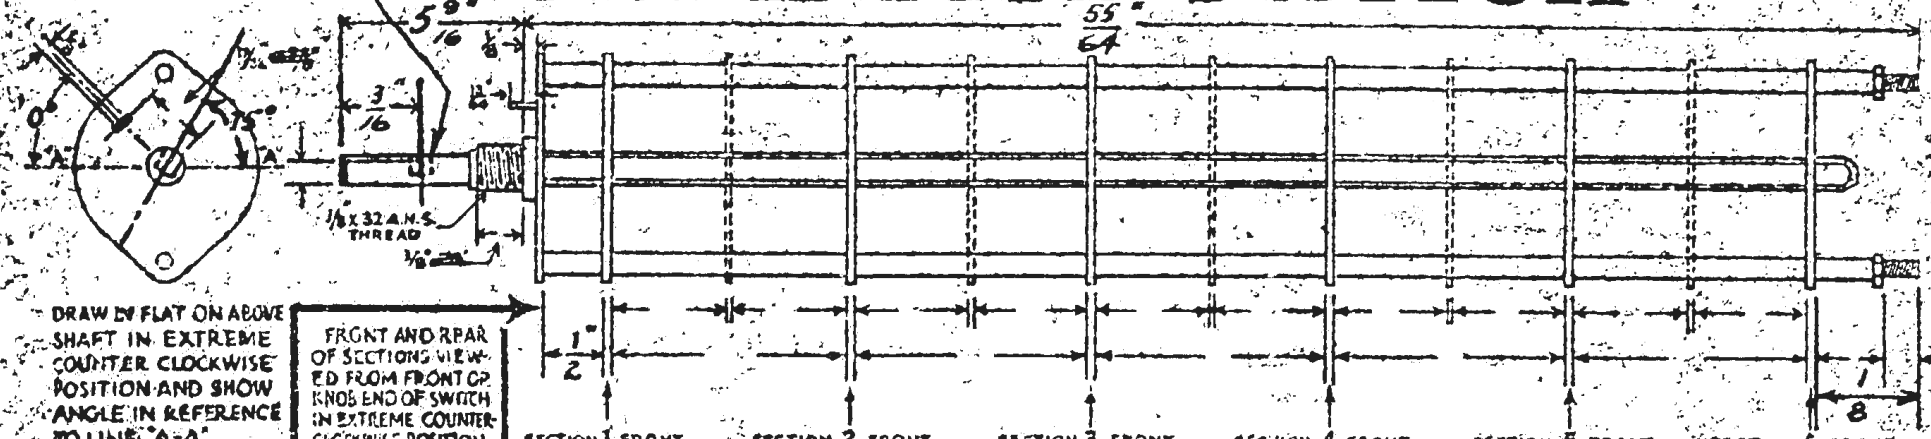

DRAW IN FLAT ON ABOVE SHAFT IN EXTREME COUNTER CLOCKWISE POSITION AND SHOW ANGLE IN REFERENCE TO LINE "A-A"

FRONT AND REAR OF SECTIONS VIEWED FROM FRONT OR KNOB END OF SWITCH IN EXTREME COUNTER-CLOCKWISE POSITION

TOTAL NO. OF SECTIONS 1

NO. OF POSITIONS 12

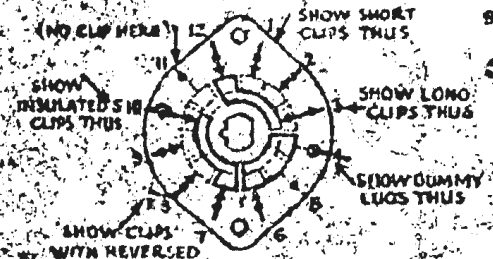

OUTLINE ROTOR BLADES AS ABOVE IN EXTREME COUNTER-CLOCKWISE (LEFT) POSITION

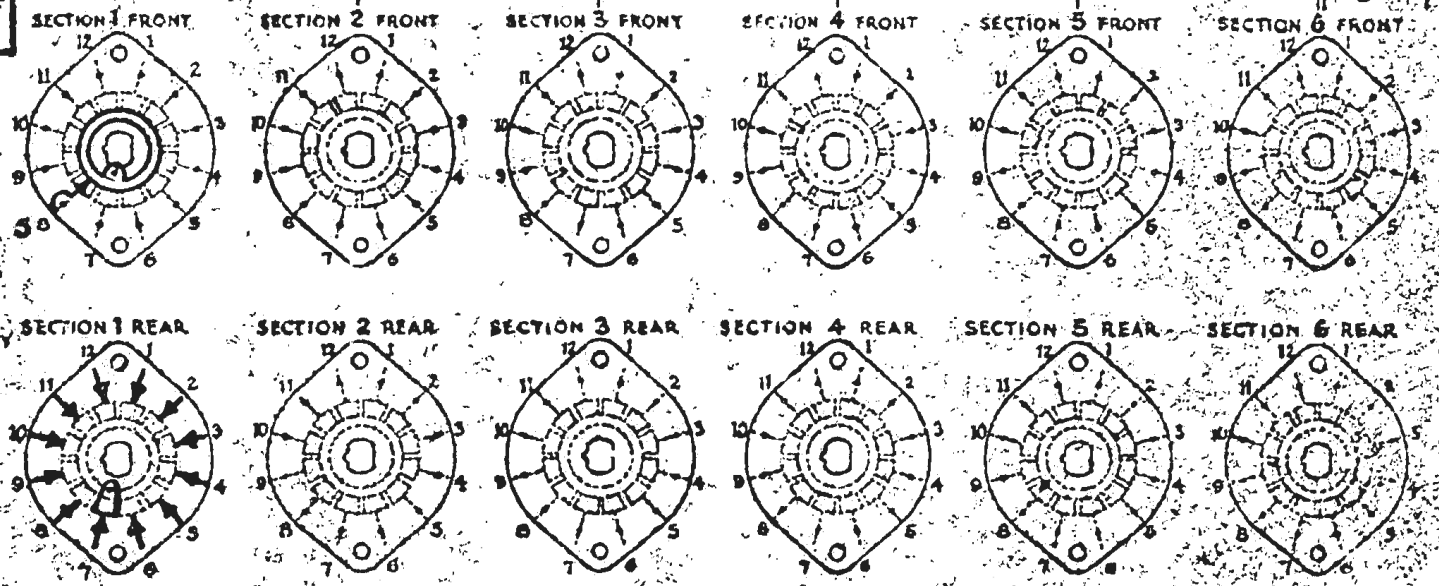

Stators—1/16" thick, with insulated clips 3/4". Mounting centers 1 3/16".

Locating Keys—1/8" wide 17/32" or 3/8" radius at 15° intervals from "A-A." These dim. apply to Double Keys which are 180° apart.

Min. Spacing of Sections—Single sided sections 3/16" when clips face away from each other, 1/4" when clips face in same direction as adjoining sections, and 5/16" when clips of both sections face toward each other.

Min. Spacing between Front Plate and first section 5/16" with clip to rear of first section, 3/16" with clips facing front.

Shields—Standard 1/16" thick and shape of stator.

Rotor Blades—The rotor blades are normally furnished with "shorting" type teeth which maintains connection with one contact until after the next contact is made.

"Non shorting" type rotor teeth are available if specified and they completely open one contact before they contact to the next contact.

CUSTOMER'S NOTES

OAK No. 28182-H

USED IN C.U. (1) - 4 FT (8)

CUSTOMER'S PART NO. PX-7-228

CUSTOMER MOORE SCHOOL - U. of P.

OAK MANUFACTURING CO.
4960 ELYBOURN AVE. CHICAGO, U.S.A.