OAK TYPE (HC, DH, DHC, QH, QDH, QHC, QDHC) SWITCH

CIRCLE TYPE DESIRED

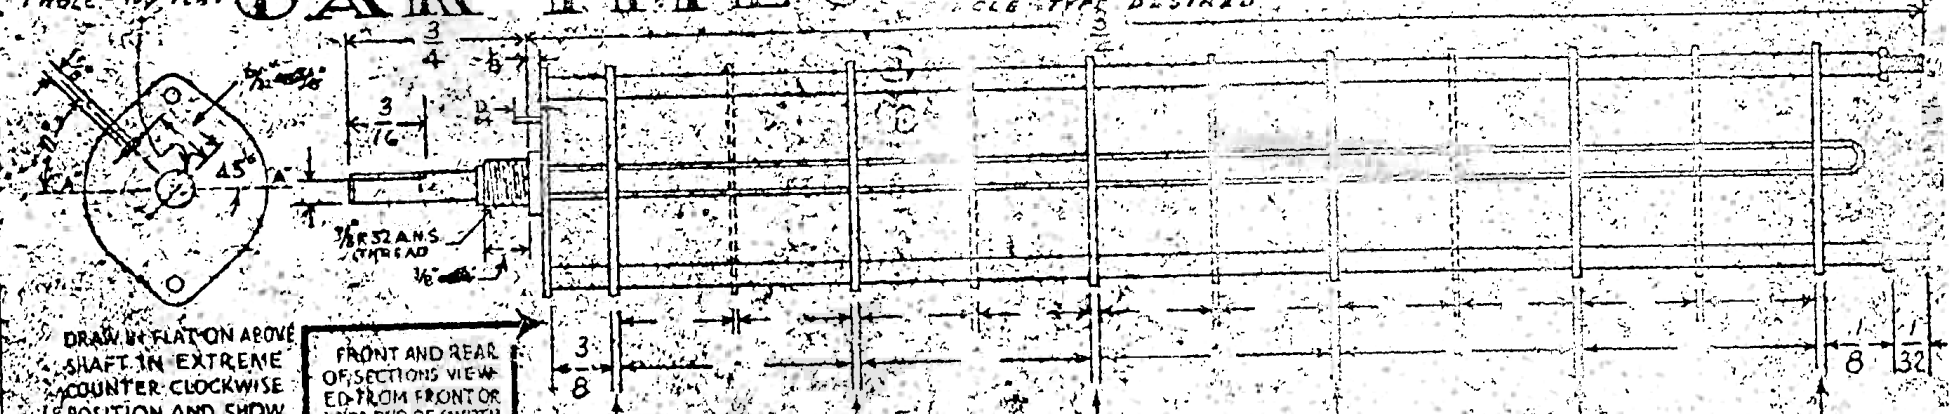

DRAW BY FLAT ON ABOVE SHAFT IN EXTREME COUNTER CLOCKWISE POSITION AND SHOW ANGLE IN REFERENCE TO LINE "A-A"

FRONT AND REAR OF SECTIONS VIEWED FROM FRONT OR KNOB END OF SWITCH IN EXTREME COUNTER CLOCKWISE POSITION

TOTAL NO. OF SECTIONS 1

NO. OF POSITIONS 10

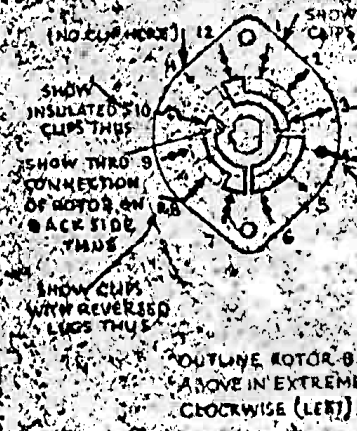

OUTLINE ROTOR BLADES AS ABOVE IN EXTREME COUNTER-CLOCKWISE (LEFT) POSITION

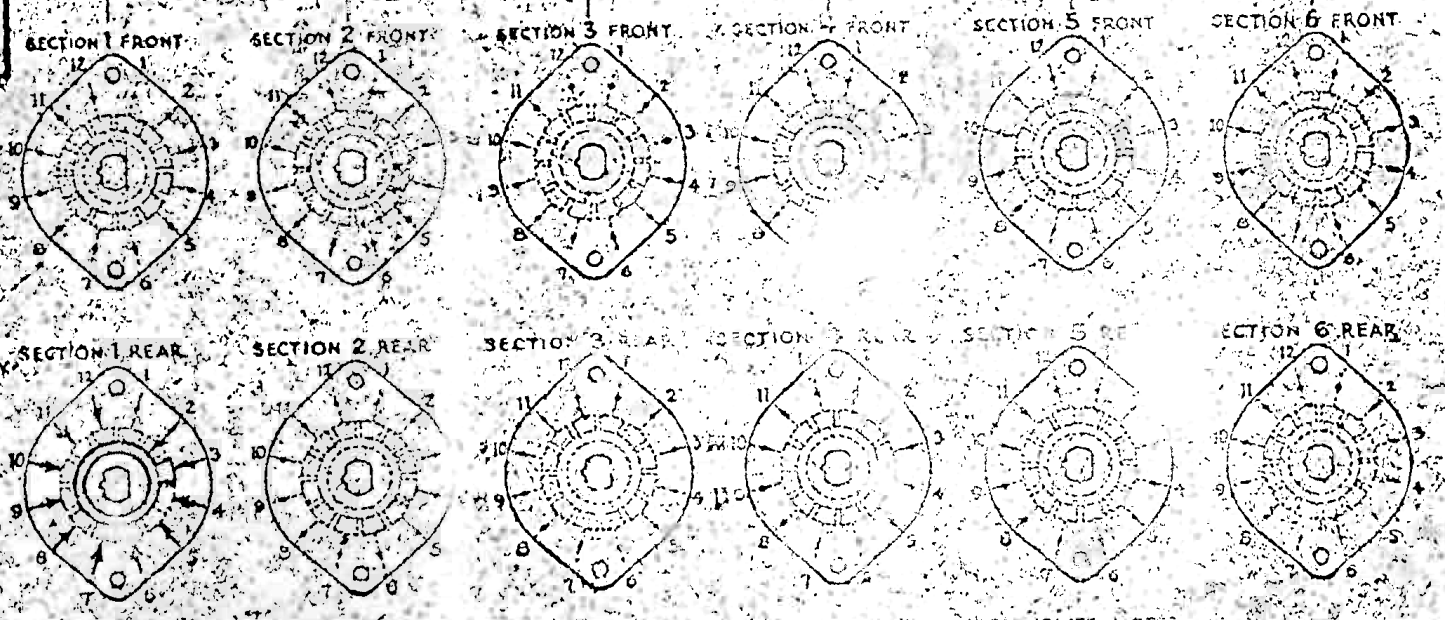

FILL IN ALL DIMENSIONS INDICATED ABOVE AND CHECK ALL SPECIFICATIONS BELOW. REFER TO OAK ENGINEERING DATA SHEETS FOR STANDARD DIMENSIONS OF TYPE DESIRED AND FOR SPECIMEN OF THIS LAYOUT SHEET. TO OBTAIN MOST ECONOMICAL UNITS AND SHORTEST DELIVERY DATES PLEASE ADHERE TO THE STANDARDS AS CLOSELY AS POSSIBLE.

SPECIFICATIONS

SHORTING TYPE CONTACTS ☑ NON-SHORTING ☐ IF NOT SPECIFIED SHORTING TYPE WILL BE SUPPLIED.

INSULATION: BAKELITE ☑; CERAMIC ☐; SPECIFY IMPREGNATION IF REQUIRED _____

FINISH REQUIREMENTS: COMMERCIAL ☐; ARMY ☐; NAVY ☐; SALT TEST (IF ANY GIVE DETAILS) _____

CONTACTS AND ROTORS: SILVER PLATED BRASS ☐; SOLID SILVER ALLOY ☐; IF NOT SPECIFIED SILVER PLATED BRASS WILL BE SUPPLIED.

MOUNTING HARDWARE: SUPPLY _____ 3/8" - 32 NUTS _____ ACROSS FLATS; MATERIAL _____ PLAT. NO. _____

_____ 3/8" INTERNAL TOOTH LOCKWASHERS; MATERIAL _____ PLAT. NO. _____

STAMP PART NUMBER _____ (NUMBER) ON FRONT PLATE: YES ☐ NO ☐

CUSTOMER NOTES

Oak No. 26552-41

Used in Part F.T.

9-A-45

OAK MANUFACTURING CO.
1260 CLYBOURN AVE. CHICAGO 10, ILL.

CUSTOMER Moody Schools U of P
CUSTOMER'S PART NO. PK-7241