OAK "H" TYPE SWITCH

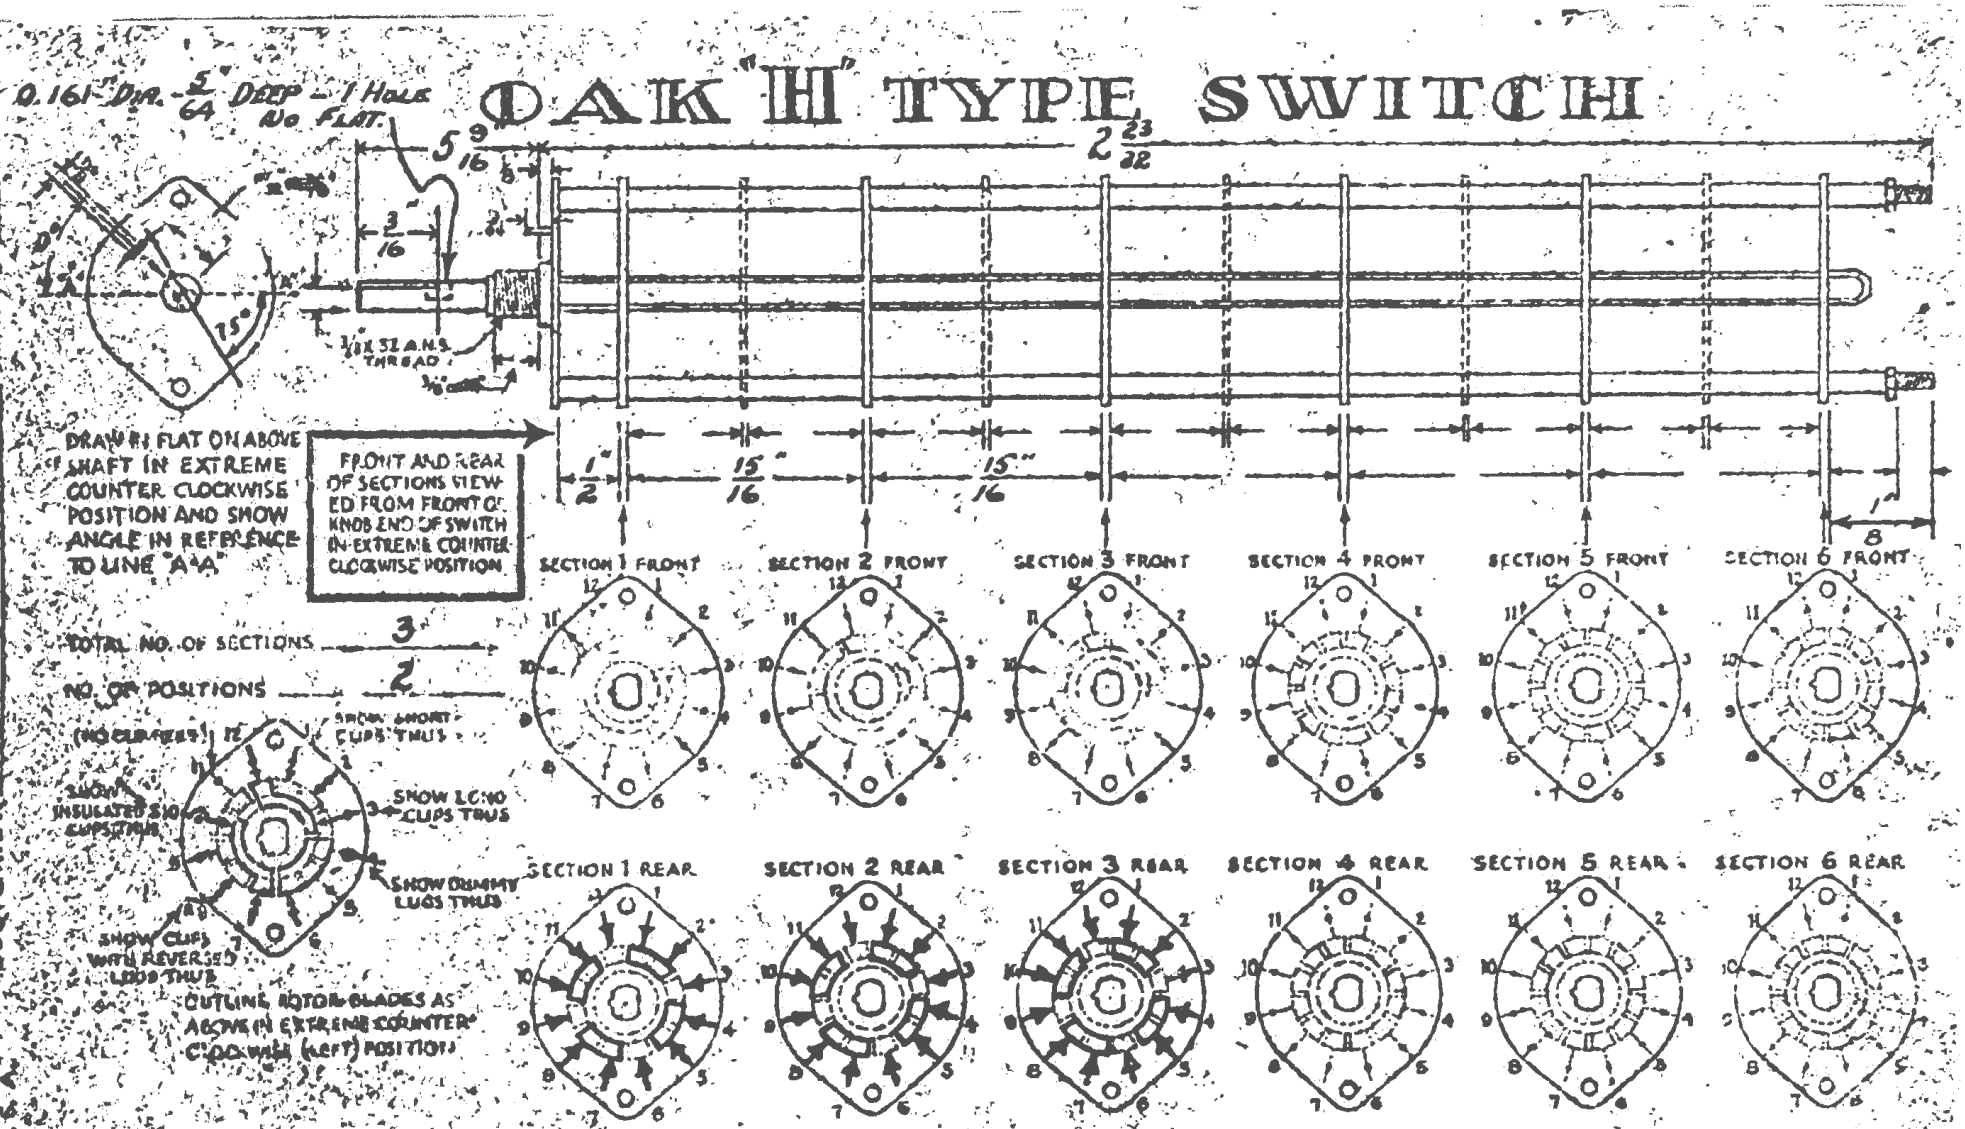

Stators—1/8" thick, with complete clips 3/4". Mounting studs 3/8".

Locating Keys—1/8" wide 1/8" or 3/8" radius, at 15° intervals from "A-A". These also apply to Double Keys which are 180° apart.

Min. Spacing of Sections—Single sided sections 3/16" when clips face away from each other; 5/16" when clips face in same direction as adjoining sections, and 1/8" when clips of both sections face toward each other.

Min. Spacing between Front Plate and first section 3/16" with clip to rear of first section, 5/16" with clips facing front.

Shields—Standard 1/8" thick and shape of stator.

Rotor Blades—The rotor blades are normally furnished with "shorting" type teeth which maintains connection with one contact until after the next contact is made.

"Non shorting" type rotor teeth are available if specified and they completely open one contact before they connect to the next contact.

CUSTOMER'S NOTES

REVISION:

POSITION ANGLE OF HOLE IN SHAFT CHANGED BY 180°.

USED IN M.R. (8)

29

OAK MANUFACTURING CO. 1700 CLYBOURN AVE., CHICAGO, U.S.A.

CUSTOMER MOORE SCHOOL - U. of P.

CUSTOMER'S PART NO. PX-8-202 A