
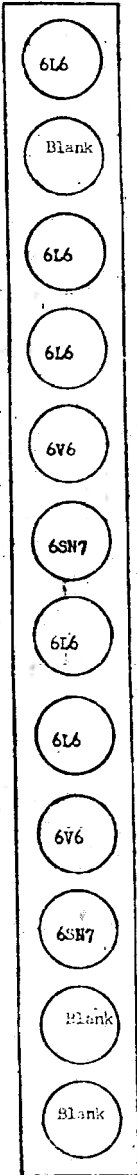


STATIC TESTS

Meter Reference Voltage	VOLTAGE AT PIN NUMBER							
	1	2	3	4	5	6	7	8
-40	115 115	115 115	265 265	265 265	90 90	---	115 115	40 40
-40	-90 -90	-90 -90	90 -25	90 -25	-76 -90	---	-90 -90	-90 -90
-40	60 60	115 115	190 190	115 115	40 40	---	115 115	60 60
-130	130 130	205 205	280 280	205 205	130 145	---	205 205	130 146
-130	205 118	205 205	130 146	107 90	205 118	90 90	205 205	205 205
-130	130 130	205 205	288 280	280 280	90 90	---	205 205	130 130
-130	130 130	205 205	280 280	280 280	90 90	---	205 205	130 130
-130	130 130	205 205	280 280	205 205	130 145	---	205 205	130 146
-130	205 118	205 205	130 146	107 90	205 118	90 90	205 205	205 205

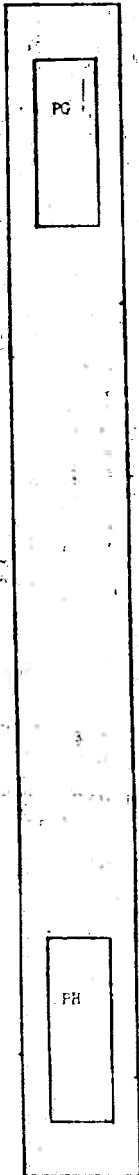

LEGEND

125 Tube Out
60 Tube In

125 Tube Out
150 Tube In & Neon Off
170 Tube In & Neon On

DYNAMIC TESTS:-

Put in negative train 11-12

check output pulses 11,12 which should be separated by 1.2 μs

MOORE SCHOOL OF ELECTRICAL ENGINEERING
UNIVERSITY OF PENNSYLVANIA

C.U. DELBY LINE, RINGS, EOFF-BERT PULSE STANDARDIZER & PUG-IN UNIT TESTING CHART

MATERIAL: RNSH SCALE:

Drawn by: *H. Eckert* 11/19/55

Checked by:

Approved by: *[Signature]* 9-4-55

PX-9-139