

		Set-Up of Function Table 1													
ARG.		A(11)	A(10)	A(9)	A(8)	A(7)	A(6)	A(5)	A(4)	A(3)	A(2)	A(1)	B(9)	B(8)	B(7)
a'	G(v <sup>2</sup> )												0	0	9
													0	0	9
													0	9	0
													0	9	0
a''	G(v <sup>2</sup> )												9	0	0
													9	0	0

		Set-Up of Function Table 2													
ARG.		A(11)	A(10)	A(9)	A(8)	A(7)	A(6)	A(5)	A(4)	A(3)	A(2)	A(1)	B(9)	B(8)	B(7)
a'	G(v <sup>2</sup> )														

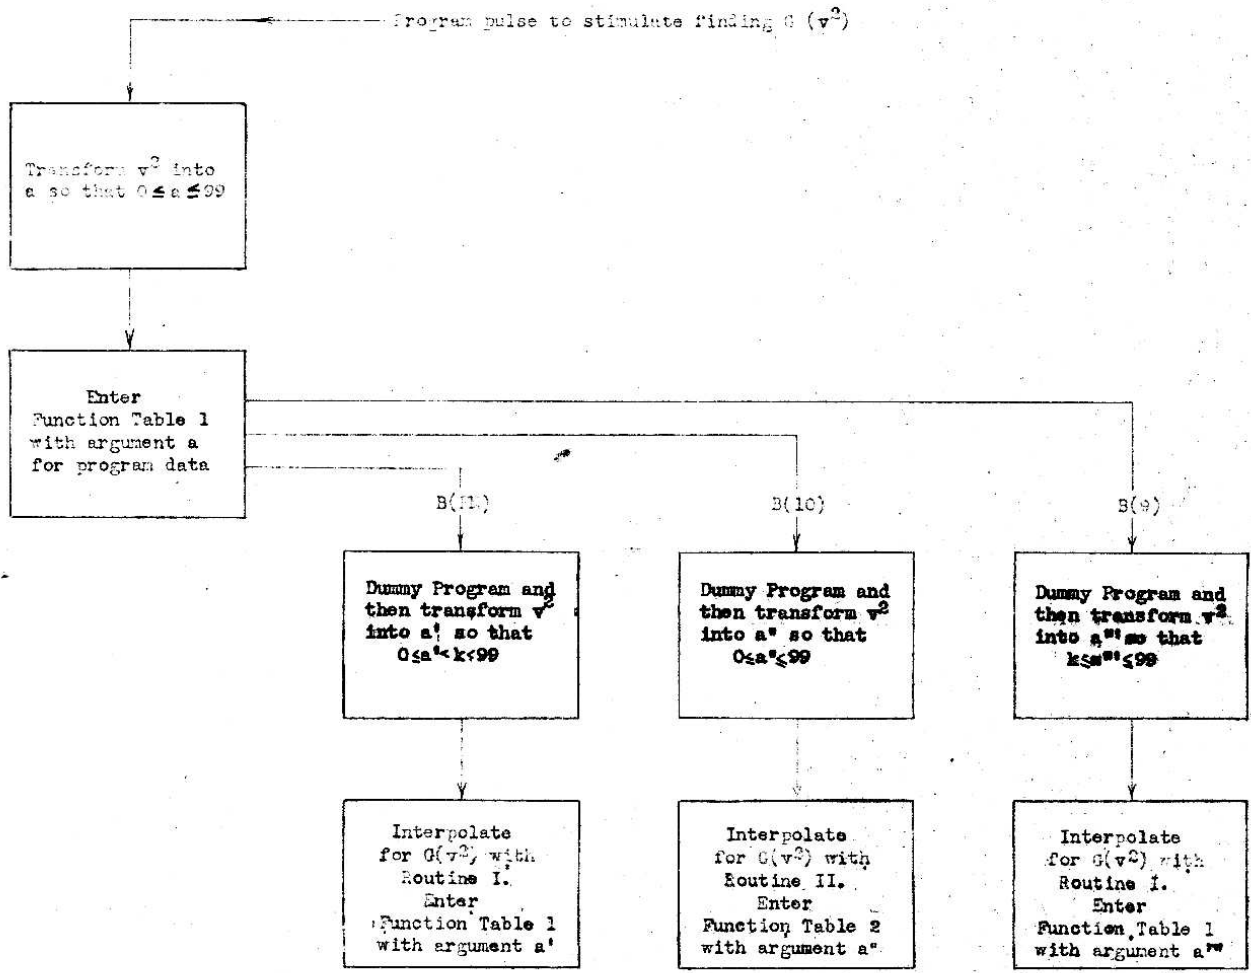


Figure 7-4

Storage of the G Function and Programming Instructions Regarding Use of the Tabulated Function